

Cite this article

Barns D, Loveridge F, Sainati T *et al.* (2026)
Barriers and enablers to dual use of transportation tunnels for heating and cooling decarbonisation.
Proceedings of the Institution of Civil Engineers – Civil Engineering **179**(2): 133–146,
<https://doi.org/10.1680/jcien.25.00042>

Research Article

Paper 2500042

Received 20/02/2025

Accepted 11/12/2025

Published with permission by Emerald Publishing Limited under the CC-BY 4.0 license.
(<http://creativecommons.org/licenses/by/4.0/>)

Civil Engineering



Barriers and enablers to dual use of transportation tunnels for heating and cooling decarbonisation

David Barns

School of Earth & Environment, University of Leeds, Leeds, UK
(Orcid:0000-0001-5030-6137) (corresponding author: d.g.barns@leeds.ac.uk)

Fleur Loveridge

School of Civil Engineering, University of Leeds, Leeds, UK
(Orcid:0000-0002-6688-6305)

Tristano Sainati

Department of Management, Economics & Industrial Engineering,
Politecnico di Milano, Milan, Italy; Department of Leadership and
Organizational Behaviour, BI Norwegian Business School, Milan, Italy
(Orcid:0000-0003-0846-8348)

Zoë Edmonds

HS2 Ltd, London, UK

William Patrick Duffy

Bechtel, London, UK

Alistair Hitchcock

Head of Engineering & Development, HS2 Ltd, Birmingham, UK



The potential to source thermal energy from buried infrastructure such as tunnels and metro stations may offer significant potential to reduce the carbon dioxide emissions of heating and cooling, and reduce the costs associated with dedicated drilling for traditional ground-sourced systems. However, this remains a niche approach with few commercial schemes globally, partly due to high initial costs, long payback periods, technical uncertainties and the need to minimise construction risk and delays. To help address these challenges, the energy resource potential, technical and economic barriers and ways of overcoming them were examined for tunnels beneath Manchester and Crewe that were proposed as part of the HS2 Phase 2b railway construction. A worthwhile thermal resource was established, along with enthusiasm for use of the energy by the infrastructure developer and third parties in the vicinity. The economic case is set out, which establishes financial viability but with significant uncertainty based on future market conditions. This demonstrates the need for a supportive future policy environment to encourage the uptake of all available heat sources.

Keywords: buried structures; cooling; district heating; energy; energy geotechnics; heat; infrastructure planning; sustainability; sustainable development; thermal energy storage; tunnels & tunnelling; UN SDG 13: Climate action

1. Introduction

The challenge of reducing the carbon dioxide emissions (CDE) of heating and cooling will be subject to competing demands for low carbon dioxide/environmental energy sources (Baruah *et al.*, 2014; Eyre and Baruah, 2015). Power-to-heat technologies such as heat pumps will place demands on the electricity grid, which will also need to supply sufficient green electricity to enable the shift to electrified transport (DESNZ and DBEIS, 2020). Meanwhile, civil engineers are ever more aware of the need to reduce the environmental impacts from infrastructure and seize opportunities to support decarbonisation efforts (Howells, 2023).

Subsurface infrastructure assets such as building foundations, tunnels, metro stations and wastewater systems can be used for

heat capture and storage alongside their primary function (Lagoeiro *et al.*, 2019; Meibodi and Loveridge, 2021). These so-called ‘energy geostructures’ act as underground heat exchangers. Subject to suitable operational temperature limits, this can facilitate underground storage of waste heat from cooling during summer and the subsequent extraction of that heat from the ground in winter to provide heating. Energy geostructures can also support heating and cooling decarbonisation through enabling access to ground and environmental thermal energy sources that would otherwise be technically or economically inaccessible (Loveridge *et al.*, 2022). Because they avoid the need for dedicated drilling and special-purpose ground heat exchangers, energy geostructures can offer opportunities to reduce the capital costs needed for accessing shallow geothermal energy (Anis Akrouh *et al.*, 2020;

Loveridge *et al.*, 2020; Lu and Narsilio, 2019). Energy tunnels are one type of energy geostructure – they involve embedding heat transfer pipes in the linings of tunnels, typically during construction, to extract thermal energy from the earth around the tunnels and from within the tunnels themselves (Adam and Markiewicz, 2009; Franzius and Pralle, 2011).

However, despite the opportunities presented by energy tunnels, they remain a novel approach, with operational projects limited to small-scale test developments. Most trials have involved tunnel boring machine (TBM) construction with plastic heat transfer pipes within precast concrete tunnel lining segments (Figure 1), requiring pipe joints as segments are connected. A design example from Crossrail in London (which was never built, see Section 4) is shown in Figure 2. Completed trials include the Stuttgart–Fasanenhof urban railway in Germany and the Jenbach (Franzius and Pralle, 2011) and Lainzer (Adam and Markiewicz, 2009) tunnel projects in Austria. The pipework installation in these cases runs to tens of metres, but a reasonable energy capture requires around 500 m to 1 km length of tunnel activation. Following a trial section, a commercial project is under consideration with 15.7 km of tunnels and metro stations of the Turin metro line 2 extension acting as sources and customers for thermal energy (Barla and Insana, 2023).

In the UK, attempts were made to develop projects during Crossrail and in Phase 1 of High Speed 2 (HS2), both in London (Legg, 2014: p. 2; Nicholson *et al.*, 2014a), but neither proceeded to construction. The work presented in this study brings together existing state-of-the-art knowledge on the feasibility of energy tunnels, with lessons learnt from those two projects, and a novel

socio-economic assessment for energy tunnels beneath Manchester and Crewe as part of the previously planned HS2 Phase 2b. (HS2 Ltd, 2022a) Together, this analysis helps to illustrate the steps required to unlock this solution for wider uptake.

1.1 HS2 case study and study scope

HS2 is the UK's new high-speed rail line from London towards the northwest. Phase 1, from London to Birmingham, is currently under construction. Phase 2, between Birmingham and Manchester, was due to be built by 2035. The project client (HS2 Ltd) has committed to be net zero carbon in operation and construction by 2035 (timeframe under review) (HS2 Ltd, 2022b). Separately, the HS2 energy strategy commits the institution to generate heat and power for on-site facilities wherever possible (HS2 Ltd, 2020, p. 2). Additionally, HS2 Ltd has a strategic goal to be a 'good neighbour' and protect the natural environment (HS2 Ltd, 2022c). In pursuit of these commitments, HS2 Ltd was keen to explore the potential for thermal energy capture from Phase 2b assets from Crewe to Manchester.

Although not currently planned to proceed, Phase 2b of HS2 was to include new stations at Manchester airport and Manchester Piccadilly as well as twin-bored running tunnels under Crewe and separately from the south of Manchester to termination at a new Manchester Piccadilly high-speed station (HS2 Ltd, 2022d). The tunnels at Crewe and Manchester were proposed to be, respectively, 8.8 m and 7.5 m in diameter, supported by precast segmental linings, and 6.8 km and 12.8 km long (MWJV, 2021, 2022).

A team from the University of Leeds collaborated with HS2 Ltd, working to identify the most suitable locations for the use of tunnel-sourced thermal energy (Section 2), to gain an initial idea of the scale of the thermal resource (Section 3) and learn practical lessons from past UK projects to support future project delivery (Section 4). The research also included an exploration of how the tunnel heating and cooling could be used internally by the railway operator or transferred externally by way of heat networks (Section 5), the economic, business and carbon case (Section 6) and delivery models for how such a project could be realised (Section 7). The implications of this study in the wider policy landscape are discussed in Section 8, highlighting changes that would benefit both transport and energy objectives. The conclusions of this study are presented in Section 9.

2. Scope for geothermal activation from subsurface assets

Initial asset identification was undertaken considering all options for thermal capture against route plan and profile maps (HS2 Ltd, 2022a; Loveridge *et al.*, 2022). The results are shown in Table 1. The availability of detailed design information required for thermal resource analysis limited further consideration to geothermal activation of the tunnel linings only. Station boxes and foundations can offer significant additional opportunities for accessing thermal resource in the same fashion as the tunnels, and this approach is being deployed on the Turin metro. As such, this was recommended for consideration once station design information is available.

For geothermal activation of tunnel linings, a suitable point to bring thermal energy to the surface is typically required. In

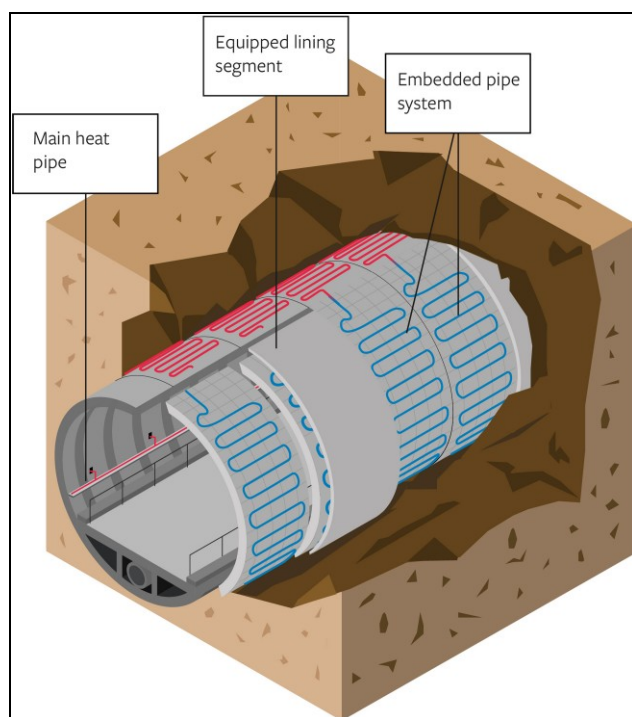


Figure 1. Schematic representation of a tunnel segmental lining equipped as a ground heat exchanger

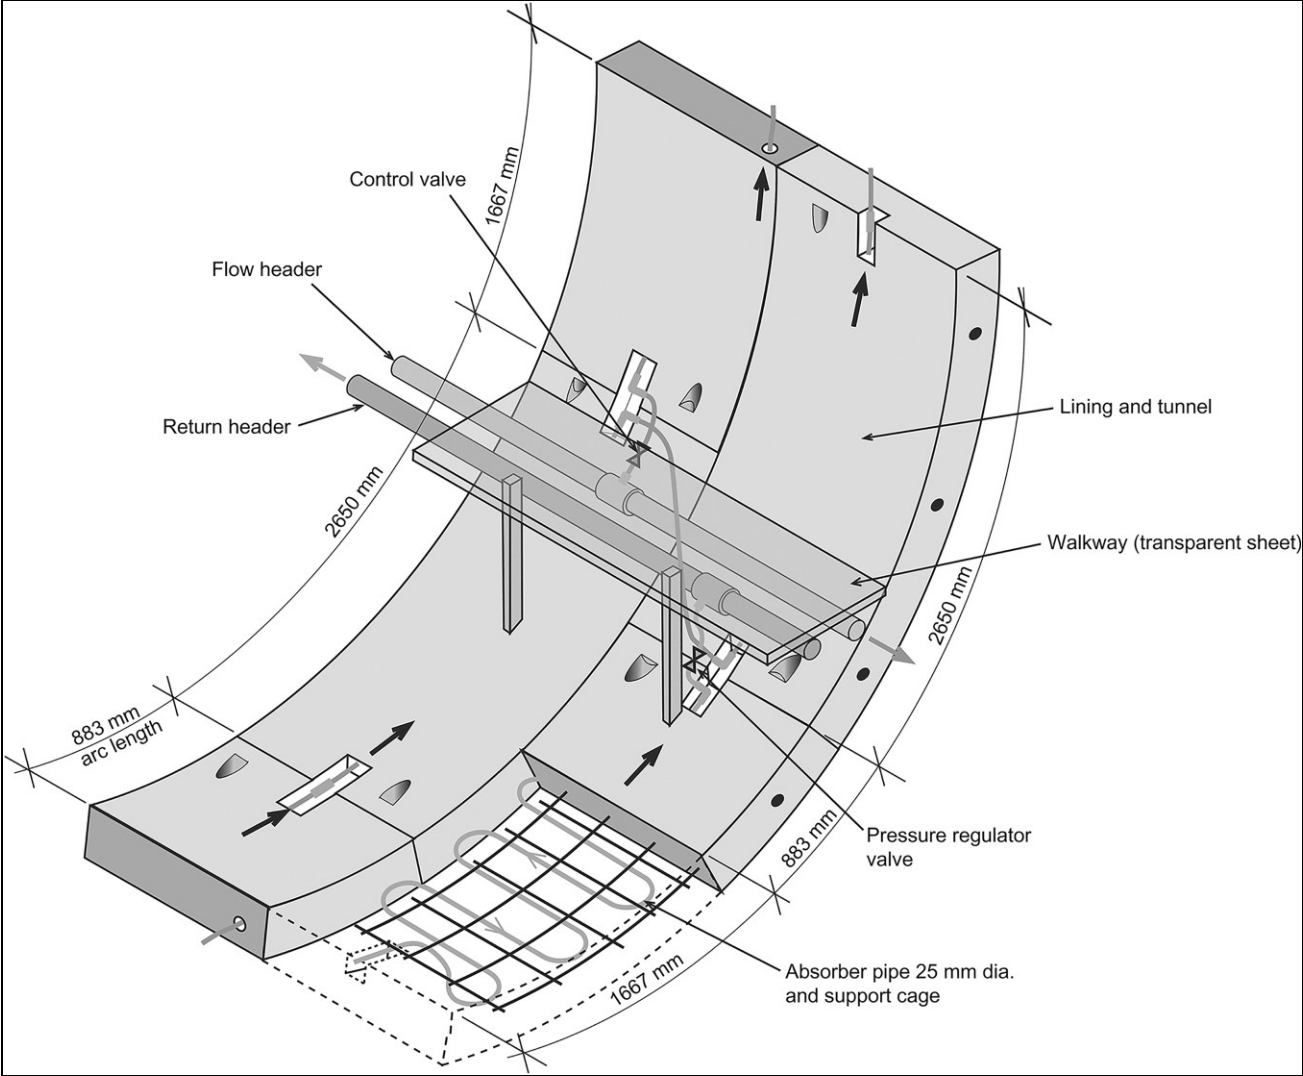


Figure 2. Schematic diagram of tunnel energy system showing embedded pipework and flow/return pipes in the tunnel (Nicholson *et al.*, 2014a)

Table 1. Potential assets for thermal activation for HS2 Phase 2b between Crewe and Manchester

Asset type	Number/details	Heat source
Tunnel lining, accessed through six ventilation shafts and four tunnel portals	16.18 km length, 447 047 m ² area	Train operations, ground thermo-hydrogeology
High-speed station	2	Waste heat from station, ground thermo-hydrogeology through foundations and station boxes
Depots	2	Ground thermo-hydrogeology through building foundations
Cutting and embankment retaining walls	26	Ground thermo-hydrogeology through thermal activation of walls
Transformer stations and electrical management sites	12	Waste heat from electrical equipment
Surface and subsurface water management (e.g. culverts, ponds)	6	Water source through heat pump

addition, the length of the heat transfer pipe that could feasibly be installed is limited by the cost of pumping energy, which can become excessive. In this study, thermal activation was kept within 500 m of ventilation shafts and tunnel portals (Figure 3). In

addition, the shafts themselves can also be thermally activated. This amounts to an activated length of tunnel of 16.18 km and ground contact surface area of 447 047 m² for thermal assessment (Table 1), covering both tunnels and shared ventilation shafts.

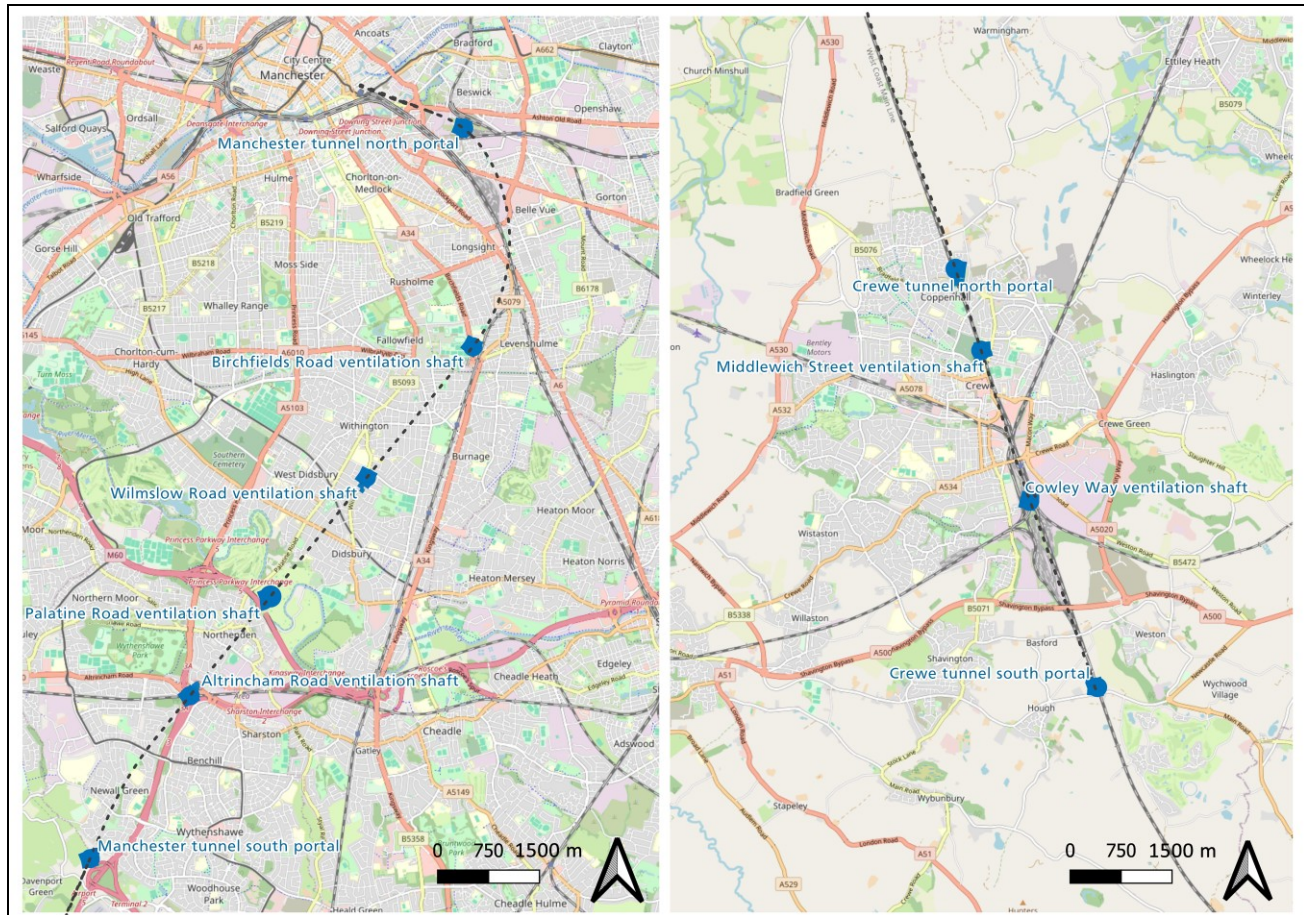


Figure 3. Maps showing route and shaft locations for the proposed Manchester and Crewe tunnels. Tunnel routes obtained from HM Government/HS2 Ltd, 2025

3. Assessment of thermal energy availability from subsurface assets

The design charts presented by Dornberger *et al.* (2022) and Di Donna and Barla (2016) were used to estimate heat transfer rates per unit area of the tunnel lining. In addition to the ground thermal conductivity, both charts require understanding of the initial ground temperature, which was assumed to be 10–12°C (Busby *et al.*, 2011). The former charts (Dornberger *et al.*, 2022) focus on the impact of the tunnel internal conditions and additionally require tunnel air temperature and air-to-lining heat transfer rates as input variables. The latter (Barla and Di Donna, 2018) focus on the influence of groundwater, requiring a groundwater flow rate (Darcy velocity).

3.1 Ground thermal and hydrogeological conditions

The ground conditions vary along the length of the proposed route, including sequences of glacio-fluvial deposits and/or glacial till overlying Triassic bedrock of the Mercia Mudstone or Sherwood Sandstone Groups. Evidence from thermal response testing shows that glacial tills and Mercia Mudstone can be assumed to have a thermal conductivity of approximately 2 W/mK (Banks *et al.*, 2013).

The quartz-rich Sherwood Sandstone would be expected to have higher conductivity, so 3 W/mK was adopted based on laboratory-scale testing (Boon *et al.*, 2021). However, field-scale conditions also include advective heat transfer due to groundwater flow, with effective thermal conductivities in thermal response tests being as much as 5 W/mK (Banks *et al.*, 2013). Possible groundwater flow rates in Sherwood Sandstone were estimated based on regional groundwater contours, which give a hydraulic gradient of 0.02–0.05 m/day, from published aquifer properties (Allen *et al.*, 1997; BGS and EA, 2010). Hydraulic conductivities are potentially highly variable, with typical values in the range 0.2–2.0 m/day, but with high flow horizons potentially exceeding 10 m/day. Groundwater flow rates (Darcy velocity) could therefore routinely be up to 0.04 m/day but could easily exceed 0.20 m/day at some horizons.

3.2 Internal tunnel conditions

A heat transfer coefficient is used to describe the overall heat transfer between the tunnel air and the tunnel lining, according to the air temperature and wind speed (Peltier *et al.*, 2019). A review of published evidence suggested that a constant conservative lower bound of 5 W/m².K is appropriate (Di Donna *et al.*, 2017; Nicholson *et al.*, 2014a, 2014b; Peltier *et al.*, 2019). This would be

representative of a tunnel airflow of less than 1 m/s. Airflow of only 5 m/s could lead to heat transfer coefficients of 20–30 W/m².K.

The tunnel air temperature is likely to be elevated with respect to both the surrounding ground and the outside ambient air temperature (Di Donna *et al.*, 2017; Smith, 2015; Thompson, 2015a, 2015b). Calculations for the tunnel ventilation design for Crossrail and HS2 Phase 1 tunnels suggested temperatures of 20–35°C depending on the time of year, train frequency, proximity to stations and rolling stock design (Nicholson *et al.*, 2014a, 2014b; Smith, 2015; Thompson, 2015a, 2015b). Since the design charts use discrete values of tunnel air temperature, 25°C was used in the method of Dornberger *et al.* (2022) and 21°C in the approach of Di Donna and Barla (2016).

3.3 Heat transfer rates per unit area of tunnel lining

Each set of design charts (Di Donna and Barla, 2016; Dornberger *et al.*, 2022) was produced for specific temperature differences between the heat source (the undisturbed ground temperature) and the sink (the heat transfer fluid temperature). Table 2 summarises four main scenarios depending on the ground, groundwater flow and tunnel internal conditions. The resulting heat transfer rates are shown in Figure 4. Based on this, two conservative choices were taken forward for analysis.

- Scenario 1 (S1): 12 W/m² for cases without significant groundwater flow or tunnel air movement.
- Scenario 2 (S2): 25 W/m² where either significant groundwater flow or tunnel air movement was present.

In reality, if both groundwater and tunnel air movements are significant, then values in excess of 30–50 W/m² could be possible. Despite this higher potential, conservative assumptions regarding heat transfer rates were applied to ensure a robust investment feasibility study.

3.4 Application ground and tunnel conditions to identified assets

S1 and S2 heat transfer rates were applied based on thermal activation of 500 m lengths of tunnel adjacent to the four tunnel portals and from either side of the six ventilation shafts (Figure 3), as well as the shafts themselves. Table 3 sets out the range of thermal resource within S1 and S2. A simplified equivalent number of houses that could be heated with the thermal resource is supplied for illustrative purposes, based on UK government figures of average annual heat demand for a UK home (DBEIS, 2021a). The thermal resource figures refer to direct energy capture only from the ground conditions and surface area of tunnel lining, without considering heat pump upgrades. The thermal resource can be

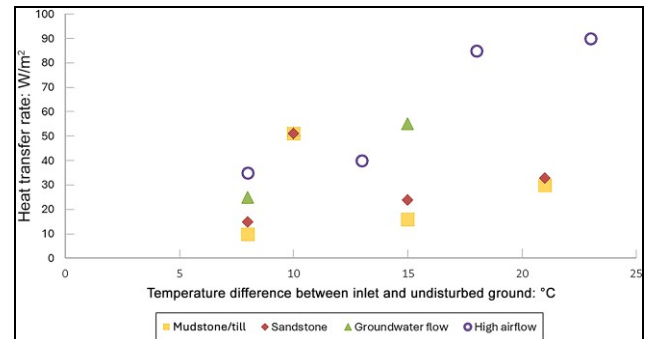


Figure 4. Tunnel energy per unit area for different conditions

Table 3. Energy availability under lower (S1) and higher (S2) heat transfer rate scenarios applying thermal estimation to identified assets

Asset type	Thermal resource: GWh/year		Equivalent number of homes heated
	S1	S2	
Tunnel portals	3.0–3.4	5.7–6.3	274–572
Ventilation shafts	6.3–7.2	11.7–13.2	574–1195

used for both heating and cooling purposes, depending on future user requirements, and by doing so would increase the efficiency and overall energy availability.

4. Overcoming challenges to successful implementation

This study sought to learn lessons from previously unsuccessful attempts to implement energy tunnels in the UK, in pursuit of maximising the chance of future success. Insights from the Crossrail project were gathered through informal stakeholder engagement with construction engineers and others involved in the development. Stakeholders reported that two types of geothermal activation were attempted: (a) for the running tunnels, designs were prepared to place heat transfer pipes within the tunnel segmental linings (Nicholson *et al.*, 2014a; Figure 2); (b) for station boxes and shafts, pipes were installed within piles and diaphragm walls, but they were not successfully connected to over-station developments for active use. Of the challenges highlighted by

Table 2. Assumptions for tunnel heat transfer coefficient calculations

Parameter	Mudstone or glacial till	Sherwood sandstone	Sandstone with moderate groundwater flow	Mudstone or sandstone with higher tunnel airflow
Ground conductivity: W/mK	2	3	3	2–3
Groundwater flow: m/day	0	0	0.5	0
Tunnel air temperature: °C				
Dornberger <i>et al.</i> (2022)	25	25	25	25
Di Donna and Barla (2016)	21	21	21	21
Tunnel internal heat transfer coefficient: W/m ² .K	5	5	5	20

construction stakeholders, all were considered solvable. The insights from stakeholder engagement are summarised as follows.

- **Lead time.** Issues encountered were largely due to insufficient lead time to fully incorporate the system into designs, contracts and construction practices, contributing to some of the other challenges to implementation.
- **Construction practices to protect heat transfer pipework.** Despite attempts to protect the heat transfer pipes within walls and piles, a number were damaged during either installation or subsequent construction activities, such that the heat available was no longer worthwhile. This issue could easily be addressed easily by better training and supervision, and clearer contractual responsibility (and potentially associated penalties) for the different civil engineering contractors to deliver a tested and commissioned system before handover.
- **Pipework jointing following segment installation.** Some manual interventions are required to make the pipework connections following segment placement by the TBM. It was established that the best approach would be for a gantry following the TBM for operatives to make the connections straight away. The responsibility for this task would need to lie with the main civil engineering contractor for the underground works.
- **Assurance.** Assurance is needed that pipework and joints will last at least the life of the tunnel. Engagement with the supply chain suggested the polymer pipes had at least a 120-year lifespan. The system should be designed such that if any section of pipework fails, it can be quickly and permanently sealed off with no risk to the tunnel integrity and minimal impact on energy availability.
- **Fire risk.** It is vital that the installed pipework does not increase the fire risk in the tunnels. Stakeholders felt that installation of the pipework at least 200 mm from the tunnel intrados would appropriately mitigate this risk. Flow and return pipework could also be embedded in mass concrete if this was felt to be necessary.
- **Maintenance.** Little maintenance was expected to be required within the tunnel once the system was commissioned and handed over. Circulation and heat pumps, which may require maintenance or replacement, can be placed outside of the tunnel environment for easier safe access.

5. Assessment of potential energy use in the vicinity of tunnel energy locations

A key factor for infrastructure developers considering investment in thermal activation of buried infrastructure is the benefit the investment is likely to deliver and how this will be derived. Energy use options were explored for the heating and cooling potential of the tunnel energy systems. Both on-site consumption by the rail operator and external thermal energy transfer to third-party customers were considered. Figure 5 illustrates how tunnel energy could be used by single large users, which could be internal or external, or distributed to multiple users by way of traditional high-temperature or newer generation ambient-temperature networks featuring distributed heat pumps at each user.

For on-site consumption by HS2 Ltd in stations and other facilities, benefit is derived through offering a source of low carbon

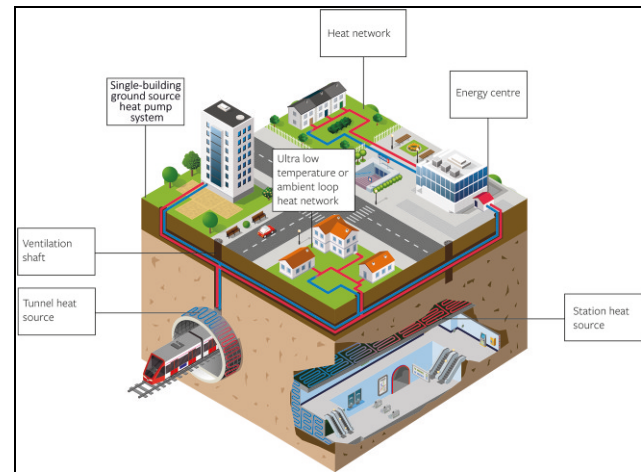


Figure 5. Tunnel energy system with different supply options

dioxide energy for heating and cooling that would otherwise not be accessible. Given HS2 Ltd's net zero commitments, an appropriate counterfactual would be air source heat pumps (ASHPs). Like the ground source energy from the tunnels, ASHPs use electricity to drive compressors that move thermal energy from outside to where it is needed within the building, and vice versa for cooling. Both approaches can be considered net zero compatible due to UK grid decarbonisation commitments or when connected to local renewable electricity generation. However, because the tunnels and surrounding earth are warmer in winter and cooler in summer than ambient air, and they can facilitate the storage of waste heat, they can deliver greater levels of efficiency for equivalent systems (Gleeson and Lowe, 2013). This translates to lower running costs, earlier achievement of net zero carbon and smaller demand on the UK's finite renewable electricity generation that supports system-wide decarbonisation efforts.

As an alternative to operator self-consumption in stations or other buildings, the energy demand from large energy consumers was considered, including nearby hospitals, universities and manufacturing sites, as well as multiple users, including homes, via heat networks (although generally referred to as heat networks, depending on the design, these can supply both heating and cooling). Heat network development is a complex and time-consuming process, and well outside of core business of a rail operator. Therefore, in reality, the ability to supply heating or cooling through a heat network depends on the current or expected future existence of a suitable network. As part of its net zero commitments, the UK government plans to implement heat network zones across England in 2025 (DBEIS, 2021b, 2022a; DESNZ and DBEIS, 2020), having already been introduced in Scotland in 2021 (Heat Networks (Scotland) Act 2021). It is expected that within heat network zones, new buildings, existing large public-sector buildings, large non-domestic buildings and residential buildings that already have communal heating or are undergoing major refurbishment will be required to connect to a heat network (DBEIS, 2022b). The primary aim of implementing this policy is to scale up heat network deployment through reducing the risk to developers and their investors (DESNZ and DBEIS, 2020).

Currently available heat networks in the vicinity of extraction points and the potential for future network development in light of heat network zoning were considered in this study. Local authority stakeholders implementing heat networks were engaged to explore the potential impact on tunnel heat demand. Mapping exercises explored potential energy demand in the vicinity of ventilation shafts and tunnel portal access points. Table 4 shows a summary of this work for a sample of extraction points. For each potential customer, a summary is provided of the demand profile (internal (i.e. the rail operator) or external (i.e. transfer to a third party)), whether a heat network would be required to deliver the energy and, if so, whether it is in place or expected to be under current plans.

Some extraction locations such as the Cowley Way ventilation shaft feature potential internal and external users. This is likely to make a more attractive investment opportunity, but with challenges in decisions around whether the energy will be used on site and issues around equity of access if serving the community

(Carley and Konisky, 2020). Other areas, however, such as around the Palatine Road ventilation shaft, feature no rail facilities for internal consumption, with primarily low-density housing and stakeholder engagement suggesting no current plans for heat network development. Without access to users through a heat network, these present less attractive opportunities.

Stakeholder engagement with large energy consumers in the vicinity of the identified assets in both Manchester and Crewe was undertaken to assess the theoretical appetite to become off-takers of heating or cooling should systems be implemented during tunnel construction. Large energy users consulted included a hospital, a heat network developer, two local authorities, a residential property developer and a university. The consultation revealed genuine interest in considering heating and/or cooling purchase in their decarbonisation plans. A summary of the responses is as follows.

- *Hospital.* The hospital stakeholder highlighted their very high year-round heating and cooling demand and associated energy costs. They were particularly interested in the cooling

Table 4. Sample of assessment of potential thermal energy customers and locations

Extraction location	Potential demand source	Demand profile	Internal or external	Connection type	Heat network in place
Manchester Tunnel north portal					
	Mixed commercial, healthcare and residential customers	Commercial, healthcare, residential	External	Heat network	Yes
	Future over-site development	Residential and commercial	External	Heat network	No
	Trackside buildings	Commercial	Internal	Direct connection	N/A
	Medium- and low-density housing	Residential	External	Heat network	No
Birchfields Road ventilation shaft					
	University campus and sports centre	Commercial and residential	External	Direct connection	N/A
	Low-density housing, two schools	Residential and education	External	Heat network	No
Palatine Road ventilation shaft					
	Hotel	Commercial	External	Heat network	No
	Low-density housing	Residential	External	Heat network	No
Wilmslow Road ventilation shaft					
	Hospital	Healthcare	External	Direct connection	N/A
	Medium-density housing	Residential	External	Heat network	No
Middlewich Street ventilation shaft					
	Civic and municipal buildings	Commercial	External	Heat network	Yes
	Medium-density housing	Residential	External	Heat network	Reliant on expansion plans
	School, care home, crematorium	Commercial, education	External	Heat network	No
Cowley Way ventilation shaft					
	Rail station (existing)	Commercial	Internal	Direct connection	N/A
	Business park	Commercial and industrial	External	Heat network	No
	University campus	Education and residential	External	Direct connection	N/A
	Trackside buildings	Commercial	Internal	Direct connection	N/A
	Supermarket	Commercial	External	Either	N/A

potential because increased summer temperatures related to climate change are increasing the need for cooling, with resilience lacking in current supply.

- *Heat network developer.* Currently in construction, a heat network was identified in the vicinity of the Manchester tunnel north portal that will initially supply a hospital, an area of new residential development and student accommodation. The stakeholder reported that they are considering a range of heat sources to support their network decarbonisation and future expansion and were keen to explore the future integration of tunnel heat.
- *Local authorities.* Support was expressed by the local authorities covering both areas of tunnel construction, although in both cases the timeframe for tunnel heat availability did not directly support their decarbonisation commitments, which require earlier achievement of net zero carbon. In the Crewe area, the local authority was keen to consider integration of tunnel heat into a heat network currently in the pre-construction phase. The local authority in the Manchester area identified social housing currently in the hands of a private landlord but due to be returned to the authority in the early 2030s as a potential ideal user of tunnel heat.
- *Property developer.* The stakeholder acted to manage land post-construction of HS2, some of which would be subject to new areas of development above the tunnels. Engagement was motivated by potential ideal alignment of development timeframes and tunnel heat availability. Although the stakeholder would not develop the land themselves, they felt there may be interest by future site developers.
- *University.* A major university with a local campus and sports centre in the vicinity of the Manchester tunnel was engaged. The tunnel construction timeline did not align with their decarbonisation commitments, and their plan for significant redevelopment of the buildings meant that a potential heat demand could not be estimated. However, they were interested in further engagement to obtain a long-term, secure energy supply.

Overall, the potential energy users were keen to continue engaging with regards to future off-take. However, it was clear that the early stages of tunnel planning (i.e. with heat delivery starting from the late 2030s) – while necessary for overcoming technical and other challenges as noted in Section 4 – likely mean little possibility of securing firm agreements at this stage. In any case, any such agreements would likely mean little over the long timeframes involved. This timescale misalignment remains one of the greatest challenges to the uptake of energy tunnels for external supply.

6. Economic, business and carbon dioxide case

As explored in Section 5, there is interest in using the tunnel heat beyond the boundary of the HS2 project. However, without detailed information about future customers and their energy demands, it is hard to determine the financial viability of this scenario. Economic modelling of internal self-consumption of heating and cooling by the rail operator was undertaken to consider the business case and financial viability where there was sufficient information to do so.

The financial case for implementing the tunnel energy system was explored through modelled costs and benefits of adopting energy tunnels connected to ground source heat pumps compared with a counterfactual case based on equivalent energy delivery with ASHPs. This was considered appropriate given both HS2 Ltd's net zero commitments and the fact that operation of the scheme will not take place for a further 10 years or more, when the use of gas boilers is not expected to be permitted (HS2 Ltd, 2022b).

A tunnel energy solution would accrue additional capital costs over and above the rail infrastructure for design, materials and installation. Benefits are primarily accrued through electricity cost and carbon dioxide savings to provide an equivalent heating and cooling demand when compared with the ASHP counterfactual.

Cost estimates for additional design, construction and commissioning activity were based on prior work considering geothermal activation of the Northolt Tunnel in HS2 Phase 1 (Legg, 2014; Smith, 2015; Thompson, 2015b, 2015a). It is accepted that these costs would need to be updated as designs develop. However, they provided a basis for analysis to clarify whether viability on purely financial terms was at least feasible. Table 5 shows a summary of the additional costs necessary to implement the tunnel geothermal lining.

Further to the additional expenditure required to install, test and commission the geothermal tunnel lining system, heat pumps would be required to deliver heating and cooling to users. Heat pump costs vary according to system size, with figures of £800/kW for geothermal heat pumps and £483/kW for the counterfactual case of commercial ASHPs, based on supply chain stakeholder guidance and DECC (2020). Table 6 shows total heat pump costs for the two tunnels for S1 and S2 system capacities and equivalent costs.

HS2 Ltd provided their financial appraisal model, which enabled estimation of the net present value (NPV), internal rate of return and discounted and undiscounted payback using HS2 and Department for Transport (DfT) approved assumptions, shown in Table 7.

Table 5. Capital expenditure (capex) for geothermal activation of tunnel lining for Manchester and Crewe tunnels

Tunnel	Tunnel dimensions	Running tunnel length for thermal activation: km	Capex per km: £ million	Total capex: £ million
Manchester	Two tunnels (dia. 7.6 m, length 12.8 km) and four ventilation shafts	10 (+131 m for ventilation shafts)	1.37	13.7
Crewe	Two tunnels (dia. 8.8 m, length 6.8 km) and two ventilation shafts	6 (+66 m for ventilation shafts)	1.47	8.9
				22.6

Table 6. Capex for heat pumps to achieve equivalent energy delivered in S1 and S2

Tunnel	Total heat pump capacity: MW	Equipment cost: £ million	
		Geothermal heat pumps	ASHPs
Manchester	4.5 (S1), 7.5 (S2)	3.6 (S1), 6.6 (S2)	2.2 (S1), 3.6 (S2)
Crewe	2.4 (S1), 5 (S2)	1.9 (S1), 4 (S2)	1.2 (S1), 2.4 (S2)

Table 7. Business case input parameters for illustrative sample of years of operation

Parameter	2035 (first year of operation)	2040	2050	2100
Discount rate (BEIS, 2021): %	3.5	3.5	3.5	3
Electricity price (real 2020 p/kWh) (Green Book, Table 4, high estimate, commercial/public sector)	15.204	14.796	14.796	14.796
CDE: kgCO ₂ e/kWh (DfT, 2022: A3.3)	0.042	0.014	0.006	0.006

The financial model inputted the estimated geothermal solution costs evenly across tunnel construction between 2028 and 2033, with heat pump costs in all scenarios incurred the year before tunnel operation is expected to begin in 2035 and replaced every 20 years. Running costs for heat pump and circulation pump electricity as well as equipment maintenance are incurred from 2035 onwards. Running costs are impacted by the expected heat pump seasonal performance factor (SPF) – the ratio of heat delivered to electricity input over one year. For the geothermal system, the SPF was assumed to be 3.0, which is a conservative assessment and could be higher with significant inter-seasonal storage of heat. For the ASHP counterfactual, all installation and equipment costs were assumed to take place in 2034 to be ready for generation in 2035, to match the heat-on date of the tunnel solution. As per the tunnel solution, energy supply and associated running costs begin from 2035, providing the same heating and cooling supply, but with SPF = 2.2. Heat pump efficiency estimates were deemed appropriate given evidence of in situ performance for UK systems (rb&m, 2024).

6.1 Results of economic modelling

The tunnel solution was found to be financially viable when compared with the ASHP counterfactual in most circumstances. However, viability is particularly dependent on real interest rates (a measure of actual interest rates minus inflation). Figure 6 shows how the tunnel system returns a favourable heat generation cost, that at real interest rates of below 2% (S1, 12 W/m²) and 4% (S2, 25 W/m²).

It is difficult to predict future inflation and interest rates, and further consideration should be given to this if achieving financial viability on these terms is essential to the decision to invest. At the time of assessment, interest rates of 5.25% and inflation of 3.9%

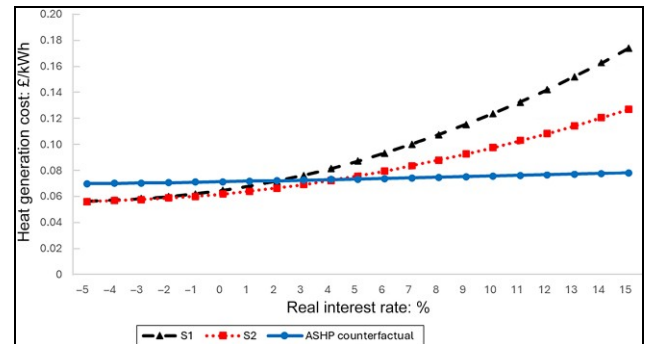


Figure 6. Real price of heat (£/kWh) expressed in £2024 against the real interest rate. Calculated by equating NPV to zero

resulted in a real interest rate of around 1.3%, indicating financial viability. In fact, data from the Bank of England and the Office for National Statistics show that real interest rates have been lower than 4% for most of this century.

A sensitivity analysis was undertaken based on the input ranges in Table 8 to assess how different factors impacted financial viability. Figure 7 shows that the future price of electricity and system efficiency (SPF) have the most significant impact on payback time of the tunnel system.

Monte Carlo analysis was performed over 20 000 simulations to consider outcomes under a range of scenarios between optimistic and pessimistic values in Table 8. Base, optimistic and pessimistic values were derived from previous projects and from HS2 Ltd's own experience, as discussed in the previous sections, with other data sources summarised in Table 8. The optimistic and pessimistic bounds were set at approximately ± 20 –30% of the base values, reflecting plausible variations based on engineering judgement and available industry data for comparable systems. Figure 8 shows that the geothermal intervention generated financial value for investors in approximately 80% of cases.

The findings of this analysis suggest that investing in the geothermal intervention is relatively secure. This is further supported by a uniform distribution between the pessimistic and optimistic values, which likely overestimate the investment uncertainty.

A potential limitation of this analysis was the given input values for the cost of capital and the inflation rate, which were provided by the HS2 Ltd financial appraisal using DfT-approved values (DfT, 2022). Given the recent changes in inflation and interest rate levels, it is uncertain whether the values provided by HS2 Ltd are still representative of the current and future economic context.

Overall, the results suggest that the proposed solution could work financially. While there are scenarios considered where it does not, consistently conservative assumptions were applied to assess the investment's feasibility. To be able to make final decisions on financial viability would require better understanding of the system's design components, especially the energy availability and the SPF of the system. These could be determined through outline design, but would require more ground investigation information and tunnel ventilation details. Additionally, the results are highly dependent on assumptions regarding interest rates, inflation and future costs of electricity, which are all exogenous to HS2. However, these sources of uncertainty could be reduced

Table 8. Input data for economic modelling sensitivity and monte carlo analyses

Input	Base value	Pessimistic	Optimistic	Input data source
Heat pump SPF	4	3	5	rb&m (2024)
Unitary price of heat (real, 2024): £; kWh	0.08	0.07	0.09	Prior project experience
Construction duration: years	5	7	5	HS2 programme
Electricity price: p; kWh	22	30	14	Prior project experience
Annual heat availability from GHE: GWh/year	76	54	98	Analysis in Section 3
Maintenance cost: £; year	129 517	174 628	90 234	HS2 Phase 1
Heat pump capex: £	7 400 959	10 477 669	4 858 732	DECC (2020)
Tunnel lining capex: £	22 566 419	27 079 703	18 053 135	HS2 Phase 1

Note: GHE, ground heat exchanger

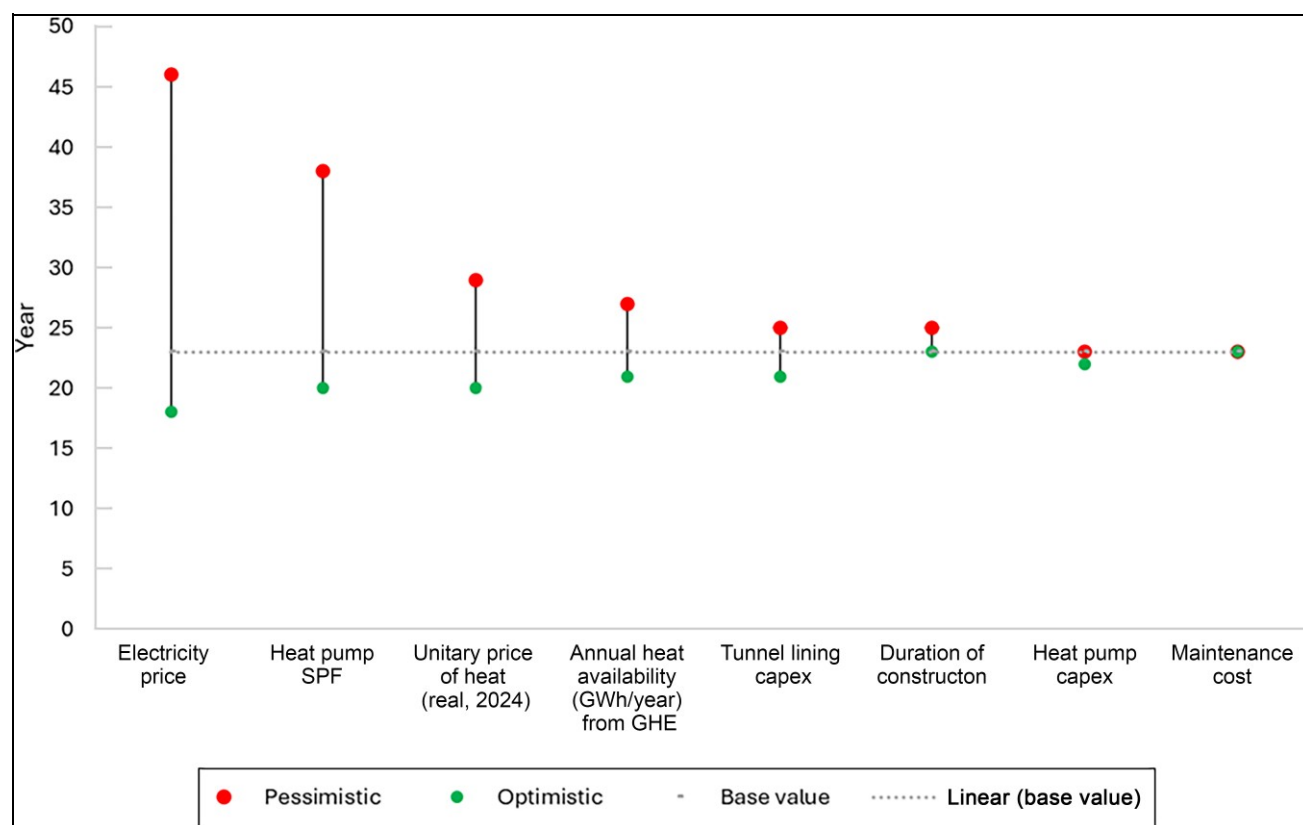


Figure 7. Sensitivity analysis of the impact of various inputs on payback time. GHE, ground heat exchanger

significantly by government policy. For example, the SDE++ (Stimulerende Duurzame Energieproductie en Klimaattransitie) in The Netherlands provides geothermal developers a guaranteed income through subsidies that cover the difference between the cost of geothermal heat production and the market price of energy for 12–15 years (RVO, 2023).

6.2 Carbon dioxide benefit

The ‘carbon benefit’ of the geothermal solution compared to the ASHP counterfactual were modelled for the two heat transfer rate scenarios (S1 and S2), as set out in Table 9. Both approaches can be considered net zero compatible when using the input of grid electricity, which is set on a path to very low CDE. However, low

levels of residual CDE associated with grid electricity generation remain, meaning that the geothermal solution delivers some operational carbon dioxide reductions due to greater levels of efficiency over the project life.

The results show a carbon dioxide saving of 271–490 t/year, primarily delivered early on in the operating life (in the late 2030s and early 2040s). The modelling was conducted prior to the UK government’s commitments to reach 95% of UK electricity generation from clean sources by 2030 (DESNZ, 2024a). This will reduce the direct carbon benefit of the higher efficiency geothermal solution. However, individual energy choices by large users such as HS2 potentially have significant system-wide impacts when scaled up to the level of a city or the GB energy system.

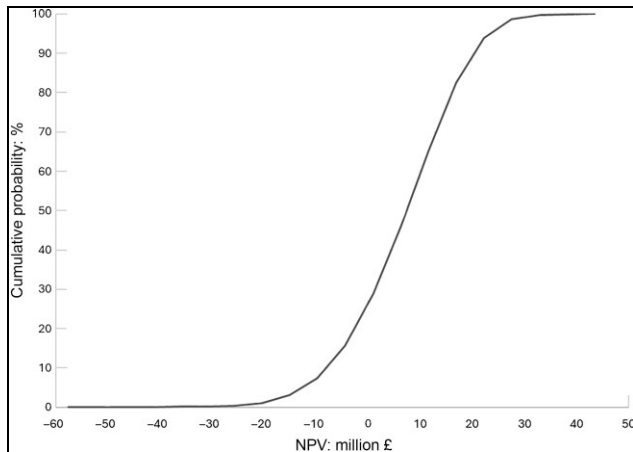


Figure 8. Results of Monte Carlo analysis for NPV showing the percentage of 20 000 simulations in which the geothermal solution resulted in a positive or negative NPV

Although not modelled here, the lower overall demand and greater flexibility of the geothermal solution can support carbon reduction in other parts of the energy system.

7. Delivery model

A range of delivery models was explored. Decisions about the appropriate model to pursue will depend on whether energy is self-consumed by the rail operator or sold to an external off-taker. In either case there are options of traditional financing (investment funded by HS2 Ltd/His Majesty's Treasury (HM Treasury)) or project financing (investment funded by lenders). Table 10 presents the four main combinations between the commercial assumptions (scenarios A and B) and the financial options (traditional financing, project financing).

The relationships involved in the two financial approaches are represented diagrammatically in Figure 9 for traditional financing and with the additional complexity of project financing in Figure 10. A special-purpose vehicle is required to ring-fence the assets and financial risk in the latter case (Sainati *et al.*, 2017).

These general delivery models were used to support discussions with large energy users and a potential lender to gauge their interest in becoming investors. They also informed various analyses to help HS2 Ltd decide whether to invest directly or use project financing. Numerous issues regarding ownership and technical warranties make it impossible to view the geothermal source as a separate asset from the railway infrastructure, making project financing difficult to implement. Consequently, it is more practical

Table 10. Primary business and financial models considered for the geothermal intervention

Commercial scenario	Financial approach	
	Traditional financing	Project financing
Scenario A: HS2/rail operator self-consumption	Model 1	Model 2
Scenario B: Single large off-taker	Model 3	Model 4

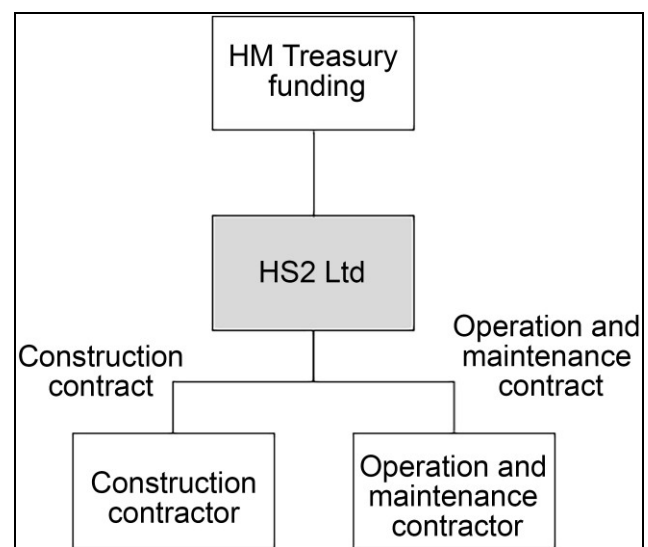


Figure 9. Model 1: scenario A and traditional financing

to consider a traditional financing approach in combination with long-term off-take contracts associated with the purchase of heat by large consumers. However, one critical challenge concerns the timing and governance complications related to negotiating such off-take agreements. To be negotiable, this investment requires a strong commitment and decision by the seller, in this case HS2 Ltd, and the funding government departments.

8. Discussion

This study found a viable case for dual-use of rail tunnels to provide heating and cooling to users above in two UK locations. While there are technical and construction challenges to be overcome, there was appetite from stakeholders to do so. There was a positive although marginal financial case for investment in the

Table 9. CDE of geothermal solution for S1 and S2, with savings compared with equivalent ASHP counterfactuals

Carbon reduction metric	S1	Counterfactual 1	S2	Counterfactual 2
CDE per year (2035): t_{CO_2}	881	1152	1596	2086
Carbon dioxide savings per year: t_{CO_2}	271	—	490	—
CDE over 60 years: t_{CO_2}	11 234	14 681	20 349	26 593
Carbon dioxide savings over 60 years: t_{CO_2}	3447	—	6244	—

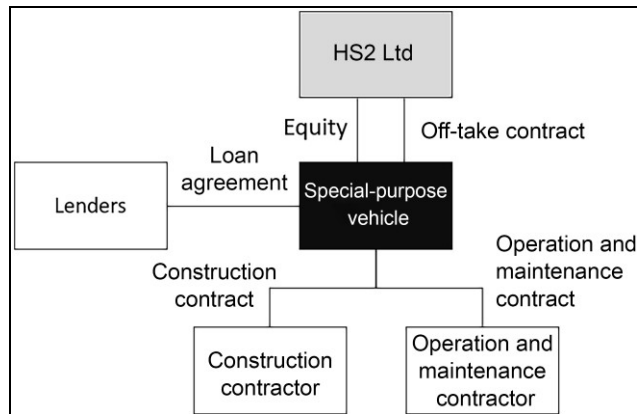


Figure 10. Model 2: scenario A and project financing

additional upfront construction costs based on long-term benefits of more efficient and lower running costs of ‘low carbon’ heat, as well as support from potential future heat users.

Although viability was marginal at the individual scheme level, given the national need for sources of energy for heating and cooling and abundant low carbon heat that could be made available through dual-use buried infrastructure, the findings of this study make the case for further consideration and development. Currently, the Phase 2B leg of HS2 is not expected to progress to construction, but huge opportunities remain. Loveridge *et al.* (2022) found 226 GWh/year energy available from planned UK transport infrastructure construction. It is therefore important to explore why this remains a highly niche approach, with few successful schemes worldwide and none in the UK.

From an economic perspective, the results of the sensitivity analysis shown in Figure 7 highlight the most important determinant of a positive financial case to be the cost of electricity. This will become ever more important as electrified heat (primarily with heat pumps either directly or through heat networks) is expected to do the heavy lifting of heat decarbonisation (DBEIS, 2021c). However, a fundamental challenge and energy market failure is the GB energy system which ties the wholesale cost of electricity to the most expensive generation (currently gas-fired) and has the effect of inflating the cost of electricity for all consumers (Harrington, 2024; Zakeri *et al.*, 2023). With the UK government having made ambitious commitments to clean power by 2030 (Milliband, 2024), there is an important link to be made between greater heat electrification and delivering against this ambition. While an unplanned deployment of inflexible, inefficient and destabilising electrified heating systems (such as electric resistance heating) could threaten the transition, the flexibility benefits of tunnel-sourced heating and cooling with the potential for storage could support the target in two ways. Firstly, as a technical mechanism to help balance the grid and intermittent renewables, primarily through being able to reduce demand at times of reduced supply. Secondly, a scheme of this kind could also provide system-wide benefits through additional flexibility, helping to decouple wholesale electricity prices from the most expensive generation and make electrified heat more cost-effective across the board (Harrington, 2024).

The findings illustrate where a more joined-up approach at national government level may help unlock project development. In this case, investment in HS2 transport infrastructure originates from the DfT, while the Department for Energy Security and Net Zero (DESNZ) is responsible for delivering against the UK’s net zero pledges, including recent commitments to clean power by 2030 as well as scaling up deployment of heat networks including through heat network zoning policies due to come into force in early 2025 (DESNZ, 2024b). Both are tied to funding from HM Treasury and subject to political decisions around investment priorities. Engagement with stakeholders suggested the process for obtaining a budget uplift to fund additional capital expenditure for the tunnel heat solution would be through an application to DfT. In short, it seems the costs fall to one part of government and benefits to another. However, access to low carbon heat is essential to support the deployment of heat networks and the successful implementation of heat network zoning. This applies to both new and established heat networks, which are expected to grow significantly to serve far greater heat demands within zonal areas. Interest was found for integrating the tunnel heat solution in both cases, including as part of zonal-scale heat networks seeking a mixed economy of heat sources to come on stream at various points over the project lifecycle.

Taking these considerations together with the resolvable technical hurdles supports the case for government to recognise currently non-quantified benefits across departments and incentivise the deployment of these types of schemes. One approach could be through HM Treasury establishment of a dedicated fund for flexible heat sources to be administered by DESNZ but which could support schemes across the public estate. Importantly, with the GB energy system operator identifying that £60 billion investment will be required by 2030 (Neso, 2024) prior to the even more ambitious 2030 clean power targets, recognising that investment in schemes like this now reduces system costs elsewhere means this does not have to be new money. Government rightly recognises required investment in the UK’s energy system as an opportunity to create economic value, as well as the important role of the private investment in delivering a clean, secure and affordable energy system (PMO, 2024). An alternative may be to support government departments and their agencies to work with private-sector partners to include innovative schemes like the tunnel heat solution in project development.

9. Conclusions

This study demonstrated that it is technically feasible and a worthwhile endeavour to use HS2 Phase 2b tunnels beneath Manchester and Crewe for the extraction of geothermal heat alongside their primary structural function. The financial case for the scheme was found to depend especially on the following key input parameters to the techno-economic assessment:

- the future cost of borrowing and inflation
- the future cost of electricity
- SPF (or system efficiency) of the ground energy system
- the future cost of thermal energy from alternative sources
- the amount of thermal energy available.

A future phase of this research would ideally include a more dynamic scenario analysis to model changes in heat demand due to climate or policy shifts.

Despite the opportunities, the geothermal solution carries additional costs and comes with technical and contractual challenges that would need to be addressed. The success of the financial model depends on reducing uncertainty in two aspects – (a) a better understanding of the future system that would come as the design progresses and (b) external financial factors such as interest rates and electricity prices.

Overall, geothermal solutions have the potential to deliver a valuable resource of low-carbon energy to provide heating and cooling to the population above. This would not only support wider decarbonisation but would also help infrastructure developers to meet their requirements as good corporate citizens. With only one opportunity to include the solution and many opportunities for future removal if it should prove to be a non-viable investment,

early adoption and development should be pursued. Since the benefits of such solutions align to different government departments to likely funding sources, cross-department support may be required. Combined with an overdue review of energy price policy, this could unlock many otherwise inaccessible but valuable heat sources in the national interest.

Acknowledgements

The authors would like to acknowledge HS2 Ltd, which funded the project, and in particular the Phase 2b Geotechnical and Innovation Teams for their guidance and support as well as access to relevant materials and opening doors to engagement with wider stakeholders. Partners from the UK Collaboratorium for Research in Infrastructure and Cities (UKCRIC) supported and provided the framework for delivery of this work.

References

- Adam D and Markiewicz R (2009) Energy from earth-coupled structures, foundations, tunnels and sewers. *Géotechnique* **59**(3): 229–236, [10.1680/geot.2009.59.3.229](https://doi.org/10.1680/geot.2009.59.3.229).
- Allen DJ, Brewerton LJ, Coleby LM *et al.* (1997) The physical properties of major aquifers in England and Wales. See <https://nora.nerc.ac.uk/id/eprint/13137/> (accessed 27/12/2025).
- Anis Akrouch G, Sánchez M and Briaud J-L (2020) Thermal performance and economic study of an energy piles system under cooling dominated conditions. *Renewable Energy* **147**: 2736–2747, [10.1016/j.renene.2018.11.101](https://doi.org/10.1016/j.renene.2018.11.101).
- Banks D, Withers JG, Cashmore G and Dimelow C (2013) An overview of the results of 61 in situ thermal response tests in the UK. *Quarterly Journal of Engineering Geology and Hydrogeology* **46**(3): 281–291, [10.1144/qjegh2013-017](https://doi.org/10.1144/qjegh2013-017).
- Barla M and Di Donna A (2018) Energy tunnels: concept and design aspects. *Underground Space* **3**(4): 268–276, [10.1016/j.undsp.2018.03.003](https://doi.org/10.1016/j.undsp.2018.03.003).
- Barla M and Insana A (2023) Energy tunnels as an opportunity for sustainable development of urban areas. *Tunnelling and Underground Space Technology* **132**: 104902, [10.1016/j.tust.2022.104902](https://doi.org/10.1016/j.tust.2022.104902).
- Baruah PJ, Eyre N, Qaddan M *et al.* (2014) Energy system impacts from heat and transport electrification. *Proceedings of the Institution of Civil Engineers – Energy* **167**(3): 139–151, [10.1680/ener.14.00008](https://doi.org/10.1680/ener.14.00008).
- BEIS (2021) Green Book supplementary guidance: valuation of energy use and greenhouse gas emissions for appraisal. See <https://www.gov.uk/government/publications/valuation-of-energy-use-and-greenhouse-gas-emissions-for-appraisal> (accessed 31/12/26).
- BGS and EA (British Geological Survey and Environment Agency) (2010) *Baseline Report Series: 8. The Permo-Triassic Sandstones of Manchester and East Cheshire. Groundwater Systems and Water Quality Commissioned Report CR/03/265C (Technical Report NC/99/74/8)*. Groundwater Systems and Water Quality Commissioned Report.
- Boon DP, Farr GJ and Hough E (2021) Thermal properties of Triassic Sherwood (Bunter) Sandstone Group and Mercia Mudstone Group (Keuper Marl) lithologies. In *Proceedings of the 2nd Geoscience & Engineering in Energy Transition Conference*. European Association of Geoscientists & Engineers, Utrecht, The Netherlands, [10.3997/2214-4609.202121040](https://doi.org/10.3997/2214-4609.202121040).
- Busby J, Kingdon A and Williams J (2011) The measured shallow temperature field in Britain. *Quarterly Journal of Engineering Geology and Hydrogeology* **44**(3): 373–387, [10.1144/1470-9236/10-049](https://doi.org/10.1144/1470-9236/10-049).
- Carley S and Konisky DM (2020) The justice and equity implications of the clean energy transition. *Nature Energy* **5**(8): 569–577, [10.1038/s41560-020-0641-6](https://doi.org/10.1038/s41560-020-0641-6).
- DBEIS (Department for Business, Energy & Industrial Strategy) (2021a) Energy follow up survey (EFUS) 2017 reports. See <https://www.gov.uk/government/publications/energy-follow-up-survey-efus-2017-reports> (accessed 27/12/2025).
- DBEIS (2021b) Proposals for heat network zoning. See <https://www.gov.uk/government/consultations/proposals-for-heat-network-zoning> (accessed 27/12/2025).
- DBEIS (2021c) Heat and buildings strategy. See <https://www.gov.uk/government/publications/heat-and-buildings-strategy> (accessed 23/01/2026).
- DBEIS (2022a) Energy Security Bill contextual note: heat network zoning and the planning system. See <https://www.gov.uk/government/publications/energy-security-bill-factsheets/energy-security-bill-contextual-note-heat-network-zoning-and-the-planning-system> (accessed 27/12/2025).
- DBEIS (2022b) Heat networks: proposals for heat network zoning: Government response. See <https://www.gov.uk/government/consultations/proposals-for-heat-network-zoning-2023/outcome/proposals-for-heat-network-zoning-2023-government-response-accessible-webpage> (accessed 26/01/2026).
- DECC (Department of Energy & Climate Change) (2020) Air source heat pump cost data. See http://2050-calculator-tool-wiki.decc.gov.uk/cost_categories/64 (accessed 27/12/2025).
- DESNZ (Department for Energy Security & Net Zero) (2024a) *Clean Power 2030 Action Plan: A New Era of Clean Electricity*. See <https://www.gov.uk/government/publications/clean-power-2030-action-plan> (accessed 23/01/2026).
- DESNZ (2024b) Heat network zoning: overview. See <https://www.gov.uk/government/publications/heat-network-zoning-overview/heat-network-zoning-overview> (accessed 27/12/2025).
- DESNZ and DBEIS (2020) Energy white paper: powering our net zero future (No. CP 337). See <https://www.gov.uk/government/publications/energy-white-paper-powering-our-net-zero-future> (accessed 23/01/2026).
- DfT (Department for Transport) (2022) TAG data book. See <https://www.gov.uk/government/publications/tag-data-book> (accessed 27/12/2025).
- Di Donna A and Barla M (2016) The role of ground conditions on energy tunnels' heat exchange. *Environmental Geotechnics* **3**(4): 214–224, [10.1680/jenge.15.00030](https://doi.org/10.1680/jenge.15.00030).
- Di Donna A, Cecinato F, Loveridge F and Barla M (2017) Energy performance of diaphragm walls used as heat exchangers. *Proceedings of the Institution of Civil Engineers – Geotechnical Engineering* **170**(3): 232–245, [10.1680/jgeen.16.00092](https://doi.org/10.1680/jgeen.16.00092).
- Dornberger SC, Rotta Loria AF, Zhang M *et al.* (2022) Heat exchange potential of energy tunnels for different internal airflow characteristics. *Geomechanics for Energy and the Environment* **30**, 100229, [10.1016/j.gete.2020.100229](https://doi.org/10.1016/j.gete.2020.100229).
- Eyre N and Baruah P (2015) Uncertainties in future energy demand in UK residential heating. *Energy Policy* **87**: 641–653, [10.1016/j.enpol.2014.12.030](https://doi.org/10.1016/j.enpol.2014.12.030).

- Franzius JN and Pralle N (2011) Turning segmental tunnels into sources of renewable energy. *Proceedings of the Institution of Civil Engineers – Civil Engineering* **164**(1): 35–40, [10.1680/cien.2011.164.1.35](https://doi.org/10.1680/cien.2011.164.1.35).
- Gleeson CP and Lowe R (2013) Meta-analysis of European heat pump field trial efficiencies. *Energy and Buildings* **66**: 637–647, [10.1016/j.enbuild.2013.07.064](https://doi.org/10.1016/j.enbuild.2013.07.064).
- Harrington N (2024) *Addressing the High Price of Electricity in the UK: A Systems Thinking Analysis of Inflated Price Formation*. UK Collaborative Centre for Housing Excellence, Glasgow, UK.
- Heat Networks (Scotland) Act 2021. Asp 9. Her Majesty's Stationery Office, Edinburgh, UK.
- HM Government (2025) *HS2 Phase Two: from the West Midlands to Leeds and Manchester*. See <https://www.data.gov.uk/dataset/c0b9f4e6-82eb-43d1-93a7-d2b8252717f6/hs2-phase-two-from-the-west-midlands-to-leeds-and-manchester> (accessed 12/12/25).
- Howells K (2023) All civil engineers need to step up and engage with climate change. *Proceedings of the Institution of Civil Engineers – Civil Engineering* **176**(1): 3–7, [10.1680/jcien.2023.176.1.3](https://doi.org/10.1680/jcien.2023.176.1.3).
- HS2 Ltd (2020) *HS2 Energy Strategy*. HS2 Ltd, London, UK.
- HS2 Ltd (2022a) *HS2 Phase 2b plan and profile maps: Crewe to Manchester*. See <https://www.gov.uk/government/publications/hs2-phase-2b-plan-and-profile-maps-crewe-to-manchester-2022> (accessed 27/12/2025).
- HS2 Ltd (2022b) *Net Zero Carbon Plan: A Cleaner, Greener Future*. HS2 Ltd, London, UK.
- HS2 Ltd (2022c) *HS2 Corporate Plan 2022 to 2025*. See <https://www.gov.uk/government/publications/hs2-corporate-plan-2022-to-2025> (accessed 27/12/2025).
- HS2 Ltd (2022d) *Volume 1: Introduction and Methodology, HS2 Phase 2b Crewe – Manchester Environmental Statement*. HS2 Ltd, London, UK.
- Lagoeiro H, Revesz A, Davies G *et al.* (2019) Opportunities for integrating underground railways into low carbon urban energy networks: a review. *Applied Sciences* **9**(16): 3332, [10.3390/app9163332](https://doi.org/10.3390/app9163332).
- Legg M (2014) *Geothermal Liner for HS2 Bored Tunnels [C240-PBR-TN-NOT-000-000001]* (No. C240- PBR- TN- NOT- 000-000001). HS2 Ltd, London, UK.
- Loveridge F, McCartney JS, Narsilio GA and Sanchez M (2020) Energy geostructures: a review of analysis approaches, in situ testing and model scale experiments. *Geomechanics for Energy and the Environment* **22**: 100173, [10.1016/j.gete.2019.100173](https://doi.org/10.1016/j.gete.2019.100173).
- Loveridge F, Schellart A, Rees S *et al.* (2022) The potential for heat recovery and thermal energy storage in the UK using buried infrastructure. *Proceedings of the Institution of Civil Engineers – Smart Infrastructure and Construction* **175**(1): 10–26, [10.1680/jsmic.21.00018](https://doi.org/10.1680/jsmic.21.00018).
- Lu Q and Narsilio GA (2019) Cost effectiveness of energy piles in residential dwellings in Australia. *Current Trends in Civil & Structural Engineering* **3**(3): 1.
- Meibodi SS and Loveridge F (2021) The future role of energy geostructures in fifth generation district heating and cooling networks. *Energy* **240**: 122481, [10.1016/j.energy.2021.122481](https://doi.org/10.1016/j.energy.2021.122481).
- Milliband E (2024) Energy Secretary Ed Miliband sets out his priorities for the department. See <https://www.gov.uk/government/news/energy-secretary-ed-miliband-sets-out-his-priorities-for-the-department> (accessed 27/12/2025).
- Mott MacDonald and WSP Joint Venture (MWJV) (2021) *Design Element Statement: MS-290-L2 Manchester Tunnel [2DE01-MWJ-TN-DES-M003-000001] (Interim Preliminary Design Stage (CP3) No. 2DE01- MWJ- TN-DES-M003- 000001)*, Design Element Statement. HS2 Ltd, London, UK.
- Mott MacDonald and WSP Joint Venture (MWJV) (2022) *Design Element Statement: ML-245-L1 Crewe Tunnel [2PT24-MWJ-TN-DES-M002-000003] (Additional Provision 1 No. 2PT24- MWJ- TN- DES-M002-000003)*, Design Element Statement. HS2 Ltd, London, UK.
- Neso (National Energy System Operator) (2024) *Beyond 2030: A National Blueprint for a Decarbonised Electricity System in Great Britain*. NESO, Warwick, UK.
- Nicholson P, Chen Q, de Silva M, Winter A and Winterling R (2014a) The design of thermal tunnel energy segments for Crossrail, UK. *Proceedings of the Institution of Civil Engineers – Engineering Sustainability* **167**(3): 118–134, [10.1680/ensu.13.00014](https://doi.org/10.1680/ensu.13.00014).
- Nicholson P, Chen Q, de Silva M, Winter A and Winterling R (2014b) *The Design of Thermal Tunnel Energy Segments for Crossrail*. See <https://learninglegacy.crossrail.co.uk/documents/the-design-of-hermal-tunnel-energy-segments-for-crossrail/> (accessed 27/01/2026).
- Peltier M, Rotta Loria AF, Lepage L, Garin E and Laloui L (2019) Numerical investigation of the convection heat transfer driven by airflows in underground tunnels. *Applied Thermal Engineering* **159**: 113844, [10.1016/j.applthermaleng.2019.113844](https://doi.org/10.1016/j.applthermaleng.2019.113844).
- PMO (Prime Minister's Office) (2024) Tidalwave of clean energy investment worth billions unlocked ahead of Investment Summit. See <https://www.gov.uk/government/news/tidalwave-of-clean-energy-investment-worth-billions-unlocked-ahead-of-investment-summit> (accessed 27/12/2025).
- rb&m (2024) *In Situ Heat Pump Performance. Analysis of Ofgem Data 2017–2022*.
- RVO (Netherlands Enterprise Agency) (2023) *SDE ++ 2023: Stimulation of Sustainable Energy Production and Climate Transition*. RVO, Zwolle, the Netherlands.
- Sainati T, Brookes N and Locatelli G (2017) Special purpose entities in megaprojects: empty boxes or real companies? *Project Management Journal* **48**(2): 55–73, [10.1177/875697281704800205](https://doi.org/10.1177/875697281704800205).
- Smith R (2015) *Waste Heat Recovery from Long Tunnels – Part 1 [C240-PBR-TN-REP-000-000015]* (No. C240- PBR- TN- REP- 000-000015). HS2 Ltd, London, UK.
- Thompson J (2015a) *Waste Heat Recovery from Long Tunnels – Part 2 [C240-PBR-TN-REP-000-000012]* (No. C240- PBR- TN- REP- 000-000012). HS2 Ltd, London, UK.
- Thompson J (2015b) *Waste Heat Recovery from Long Tunnels – Part 3 [C240-PBR-TN-REP-000-000013]* (No. C240- PBR- TN- REP- 000-000013). HS2 Ltd, London, UK.
- Zakeri B, Staffell I, Dodds PE *et al.* (2023) The role of natural gas in setting electricity prices in Europe. *Energy Reports* **10**: 2778–2792, [10.1016/j.egyr.2023.09.069](https://doi.org/10.1016/j.egyr.2023.09.069).

How can you contribute?

If you would like to comment on this paper, please email up to 200 words to the editor at support@emerald.com.

If you would like to write a paper of 5000 words about your own experience in this or any related area of civil engineering, the editor will be happy to provide any help or advice you need.