

Nano-beams under torsion: a stress-driven nonlocal approach

Raffaele Barretta

*Department of Structures for Engineering and Architecture,
University of Naples Federico II, Naples, Italy*

Luciano Feo

Department of Civil Engineering, University of Salerno, Fisciano, Italy

Raimondo Luciano

*Department of Civil and Mechanical Engineering,
University of Cassino and Southern Lazio, Cassino, Italy*

Francesco Marotti de Sciarra

*Department of Structures for Engineering and Architecture,
University of Naples Federico II, Naples, Italy, and*

Rosa Penna

Department of Civil Engineering, University of Salerno, Fisciano, Italy

Abstract

Purpose – This study aims to model scale effects in nano-beams under torsion.

Design/methodology/approach – The elastostatic problem of a nano-beam is formulated by a novel stress-driven nonlocal approach.

Findings – Unlike the standard strain-driven nonlocal methodology, the proposed stress-driven nonlocal model is mathematically and mechanically consistent. The contributed results are useful for the design of modern devices at nanoscale.

Originality/value – The innovative stress-driven integral nonlocal model, recently proposed in literature for inflected nano-beams, is formulated in the present submission to study size-dependent torsional behavior of nano-beams.

Keywords Carbon nanotubes, Torsion, Integral elasticity, Nano-beams

Paper type Research paper

1. Introduction

Micro- and nano-devices are structures whose characteristic size (thickness, diameter, etc.) is in the order of the micron and the sub-micron. Such elements are diffusely adopted as sensors and actuators (Li *et al.*, 2008) and are scale-dependent (Kahrobaiyan *et al.*, 2011;



Tajalli *et al.*, 2009; Lam *et al.*, 2003; McFarland and Colton, 2005). Size effects were observed during micro-torsion tests on thin copper wires (Fleck *et al.*, 1994).

Beam-like components under torsional loading conditions and/or prescribed torsional displacements are used in several micro- and nano-electromechanical systems, such as microscanners (Arslan *et al.*, 2010), micromirrors (Zhang *et al.*, 2001; Huang *et al.*, 2006), micro-gyroscopes (Maenaka *et al.*, 2005) and springs (Papadakis *et al.*, 2004).

A consistent modeling of nano-structures is hence crucial for the design and optimization of modern nano-systems.

Nowadays, methodologies of nonlocal continuum mechanics are widely exploited for the analysis of nano-structures (Peddieson *et al.*, 2003; Reddy, 2007; Wang and Liew, 2007; Aydogdu, 2009; Civalek and Demir, 2011; Thai and Vo, 2012; Rafiee and Moghadam, 2014; Sedighi, 2014; Sedighi *et al.*, 2015; Barretta *et al.*, 2016b, 2016a; Feo and Penna, 2016a, 2016b).

They are mainly based on nonlocal theory by Eringen (1983).

Material parameters in nonlocal models, in addition to the classical elastic constants, are introduced to capture size effects.

Evaluation of constitutive parameters can be performed by micro-bending, micro-torsion and micro/nano indentation tests (Fleck *et al.*, 1994; Paliwal *et al.*, 2012; Brcic *et al.*, 2013; Song *et al.*, 2014).

However, the strain-driven integral elastic model proposed by ERINGEN cannot be adopted for nonlocal structural problems at nanoscale. This issue has been discussed in detail in Romano *et al.* (2017). A mechanically consistent stress-driven integral elastic model for inflected nano-beams has been recently developed in Romano and Barretta (2017a, 2017b). Comparisons between strain-driven and stress-driven nonlocal formulations have been carried out in Romano and Barretta (2017a, 2017b). Free vibrations of BERNOLLI-EULER nano-beams have been investigated in Apuzzo *et al.* (2017).

The motivation of the present paper is in applying the new stress-driven integral elastic theory to torsion of nano-beams.

The plan is the following. Basic equations governing the elastic equilibrium problem of a nano-beam under torsion, formulated according to the new stress-driven integral constitutive model, are provided in Section 2. Size-effects are computed for cantilever and doubly clamped nano-beams under uniform distributions of couples per unit length in Section 3. Concluding remarks are given in Section 4.

2. Stress-driven integral elastic model for circular nano-beams under torsion

Let us consider a circular beam at nanoscale of length L subjected to a distribution of torsional couples per unit length m in the interval $[0, L]$ and concentrated couples $\mathcal{M}$ at the end cross-sections.

The abscissa along the nano-beam axis will be denoted by x .

The geometric torsional curvature, kinematically compatible with the torsional rotation field θ , is given by:

$$\chi = \frac{d\theta}{dx}. \quad (1)$$

Equilibrium equations write as:

$$\begin{cases} \frac{dM}{dx} = -m, & \text{in } [0, L], \\ M = \mathcal{M}, & \text{at } \{0, L\} \end{cases} \quad (2)$$

with M twisting moment.

The proposed stress-driven nonlocal model for twisted nano-beams is defined by the following convolution:

$$\chi_{el}(x) = \int_0^L \phi_\lambda(x - \xi) C(\xi) M(\xi) d\xi, \quad (3)$$

with χ_{el} torsional elastic curvature, C local elastic compliance and ϕ_λ kernel function depending on a dimensionless nonlocal parameter $\lambda > 0$.

Denoting by μ is the local shear modulus, the torsional elastic compliance C is the inverse of the local elastic stiffness:

$$K := \mu J, \quad (4)$$

with J polar moment of inertia about the center of the circular cross-section.

The kernel function fulfills symmetry, positivity and limit impulsivity:

$$\begin{cases} \phi_\lambda(x - \xi) = \phi_\lambda(\xi - x) \geq 0, \\ \lim_{\lambda \rightarrow 0} \phi_\lambda(x) = \delta(x), \end{cases} \quad (5)$$

where δ is the DIRAC unit impulse at $0 \in \mathcal{R}$ and the limit being intended in terms of distributions:

$$\lim_{\lambda \rightarrow 0} \int_{-\infty}^{+\infty} \phi_\lambda(x - \xi) \cdot f(\xi) d\xi = f(x), \quad \forall f \in C^0(\mathcal{R}; \mathcal{R}), \quad (6)$$

Hereafter, we assume the following special form of the kernel:

$$\phi_\lambda(x) := \frac{1}{2L_c} \exp\left(-\frac{|x|}{L_c}\right), \quad (7)$$

where the length characteristic L_c , expressing the amplitude of the range of nonlocal action, is defined by $L_c := \lambda L$. It can be proven that the output of the stress-driven integral convolution Equation (3), described by the special kernel Equation (7), provides the unique solution of the constitutive differential equation:

$$\frac{\chi_{el}(x)}{L_c^2} - \frac{d^2 \chi_{el}}{dx^2}(x) = \frac{C \cdot M}{L_c^2}(x), \quad (8)$$

With the constitutive boundary conditions:

$$\begin{cases} \frac{d\chi_{el}}{dx}(0) = \frac{1}{L_c} \cdot \chi_{el}(0), \\ -\frac{d\chi_{el}}{dx}(L) = \frac{1}{L_c} \cdot \chi_{el}(L), \end{cases} \quad (9)$$

Geometric and elastic torsional curvature fields are assumed to be coincident in the sequel $\chi = \chi_{el}$ since a purely elastic constitutive behavior is considered.

3. Examples

The stress-driven nonlocal model illustrated in Section 2 is adopted hereafter to examine the size-dependent structural behavior of nanocantilever and doubly clamped nano-beams of length L subjected to a uniform distribution m of couples per unit length.

Twist elastic rotation fields are obtained by substituting Equation (1) in Equations (8) and (9) and prescribing differential and boundary conditions of equilibrium on the torsional moment M and kinematic boundary conditions on θ .

To this end, let us now introduce the following dimensionless parameters:

$$\begin{cases} \xi = \frac{x}{L}, \\ \theta^*(\xi) = \frac{k}{mL^2} \theta(\xi). \end{cases} \quad (10)$$

Torsional rotations θ^* versus ξ of both the nano-beams are displayed in Figures 1 and 2 for the following values of the nonlocal parameter:

$$\lambda \in \{0, 0.1, 0.2, 0.3, 0.4, 0.5\}, \quad (11)$$

4. Closing remarks

The outcomes of the present paper may be summarized as follows:

- Size-dependent behavior of nano-beams under torsion has been investigated by an innovative stress-driven nonlocal elastic model;

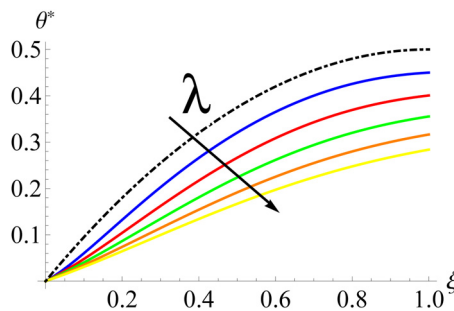


Figure 1.
Nanocantilever under
a uniform
distribution m of
couples: torsional
rotation θ^* vs ξ for
increasing values
of λ

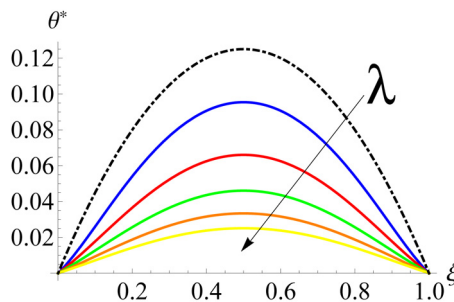


Figure 2.
Doubly clamped
nano-beam under a
uniform distribution
 m of couples:
torsional rotation θ^*
vs ξ for increasing
values of λ

- Unlike the Eringen strain-driven nonlocal integral elastic model which cannot be applied to nano-structures of technical interest, the stress-driven theory is mathematically consistent and useful for nano-electromechanical system applications;
- The proposed nonlocal strategy has been illustrated with reference to nano-cantilever and doubly clamped nano-beams subjected to a uniform distribution of torsional couples per unit length; and
- As shown in [Figures 1](#) and [2](#), the stress-driven model provides an elastic stiffness increasing with the nonlocal parameter λ .

References

- Apuzzo, A., Barretta, R., Luciano, R., Marotti de Sciarra, F. and Penna, R. (2017), "Free vibrations of Bernoulli-Euler nano-beams by the stress-driven nonlocal integral model", *Composites Part B*, Vol. 123, pp. 105-111, doi: [10.1016/j.compositesb.2017.03.057](https://doi.org/10.1016/j.compositesb.2017.03.057).
- Arslan, A., Brown, D., Davis, W., Holmstrom, S., Gokce, S.K. and Urey, H. (2010), "Comb-actuated resonant torsional microscanner with mechanical amplification", *Journal of Microelectromechanical Systems*, Vol. 19 No. 4, pp. 936-943.
- Aydogdu, M. (2009), "A general nonlocal beam theory: its application to nanobeam bending, buckling and vibration", *Physica E*, Vol. 41 No. 9, pp. 1651-1655.
- Barretta, R., Feo, L., Luciano, R. and Marotti de Sciarra, F. (2016a), "Application of an enhanced version of the Eringen differential model to nanotechnology", *Composites Part B*, Vol. 96, pp. 274-280.
- Barretta, R., Feo, L., Luciano, R., Marotti de Sciarra, F. and Penna, R. (2016b), "Functionally graded timoshenko nanobeams: a novel nonlocal gradient formulation", *Composites Part B*, Vol. 100, pp. 208-219.
- Brcic, M., Canadija, M. and Brnic, J. (2013), "Estimation of material properties of nanocomposite structures", *Meccanica*, Vol. 48 No. 9, pp. 2209-2220.
- Civalek, Ö. and Demir, Ç. (2011), "Bending analysis of microtubules using nonlocal euler-bernoulli beam theory", *Applied Mathematical Modelling*, Vol. 35 No. 5, pp. 2053-2067.
- Eringen, A.C. (1983), "On differential equations of nonlocal elasticity and solutions of screw dislocation and surface waves", *Journal of Applied Physics*, Vol. 54 No. 9, pp. 4703-4710.
- Feo, L. and Penna, R. (2016a), "On bending of bernoulli-euler nanobeams for nonlocal composite materials", *Modelling and Simulation in Engineering*, Vol. 2016, No. 2016, pp. 1687-5591.
- Feo, L. and Penna, R. (2016b), "A note on torsion of nonlocal composite nanobeams", *Modelling and Simulation in Engineering*, Vol. 2016 No. 2016, pp. 1687-5591.
- Fleck, N.A., Muller, G.M., Ashby, M.F. and Hutchinson, J.W. (1994), "Strain gradient plasticity: theory and experiment", *Acta Metallurgica et Materialia*, Vol. 42 No. 2, pp. 475-487.
- Huang, J.M., Liu, A.Q., Deng, Z.L. and Zhang, Q.X. (2006), "A modeling and analysis of spring-shaped torsion micromirrors for low-voltage applications", *International Journal of Mechanical Sciences*, Vol. 48 No. 6, pp. 650-661.
- Kahrobaian, M.H., Asghari, M., Rahaeifard, M. and Ahmadian, M.T. (2011), "A nonlinear strain gradient beam formulation", *International Journal of Mechanical Sciences*, Vol. 49 No. 11, pp. 1256-1267.
- Lam, D.C.C., Yang, F., Chong, A.C.M., Wang, J. and Tong, P. (2003), "Experiments and theory in strain gradient elasticity", *Journal of the Mechanics and Physics of Solids*, Vol. 51 No. 8, pp. 1477-1508.
- Li, C., Thostenson, E.T. and Chou, T.W. (2008), "Sensors and actuators based on carbon nanotubes and their composites: a review", *Composites Science and Technology*, Vol. 68 No. 6, pp. 1227-1249.

- Maenaka, K., Ioku, S., Sawai, N., Fujita, T. and Takayama, Y. (2005), "Design, fabrication and operation of MEMS gimbal gyroscope", *Sensors and Actuators A: Physical*, Vol. 121 No. 1, pp. 6-15.
- McFarland, A.W. and Colton, J.S. (2005), "Role of material microstructure in plate stiffness with relevance to microcantilever sensors", *Journal of Micromechanics and Microengineering*, Vol. 15 No. 5, pp. 1060-1067.
- Paliwal, B., Cherkaoui, M. and Fassi-Fehri, O. (2012), "Effective elastic properties of nanocomposites using a novel atomistic? Continuum interphase model", *Comptes Rendus Mecanique*, Vol. 340 Nos 4/5, pp. 296-306.
- Papadakis, S.J., Hall, A.R., Williams, P.A., Vicci, L., Falvo, M.R., Superfine, R. and Washburn, S. (2004), "Resonant oscillators with carbon-nanotube torsion springs", *Physical Review Letters*, Vol. 93 No. 14.
- Peddie, J., Buchanan, G.R. and McNitt, R.P. (2003), "Application of nonlocal continuum models to nanotechnology", *International Journal of Engineering Science*, Vol. 41, pp. 305-312.
- Rafiee, R. and Moghadam, R.M. (2014), "On the modeling of carbon nanotubes: a critical review", *Composites Part B*, Vol. 56 No. 2, pp. 435-449.
- Reddy, J.N. (2007), "Nonlocal theories for bending, buckling and vibration of beams", *International Journal of Engineering Science*, Vol. 45 Nos 2/8, pp. 288-307.
- Romano, G. and Barretta, R. (2017a), "Nonlocal elasticity in nanobeams: the stress-driven integral model", *International Journal of Engineering Science*, Vol. 115, pp. 14-27.
- Romano, G. and Barretta, R. (2017b), "Stress-driven versus strain-driven nonlocal integral model for elastic nano-beams", *Composites Part B*, Vol. 114, pp. 184-188.
- Romano, G., Barretta, R., Diaco, M. and Marotti de Sciarra, F. (2017), "Constitutive boundary conditions and paradoxes in nonlocal elastic nanobeams", *International Journal of Mechanical Sciences*, Vol. 121, pp. 151-156.
- Sedighi, H.M. (2014), "Size-dependent dynamic pull-in instability of vibrating electrically actuated microbeams based on the strain gradient elasticity theory", *Acta Astronautica*, Vol. 95 No. 1, pp. 111-123.
- Sedighi, H.M., Daneshmand, F. and Abadyan, M. (2015), "Dynamic instability analysis of electrostatic functionally graded doubly-clamped nano-actuators", *Composite Structures*, Vol. 124, pp. 55-64.
- Song, J., Liu, J., Ma, H., Liang, L. and Wei, Y. (2014), "Determinations of both length scale and surface elastic parameters for fcc metals", *Comptes Rendus Mecanique*, Vol. 342 No. 5, pp. 315-325.
- Tajalli, S.A., Moghimi Zand, M. and Ahmadian, M.T. (2009), "Effect of geometric nonlinearity on dynamic pull-in behavior of coupled-domain microstructures based on classical and shear deformation plate theories", *European Journal of Mechanics - A/Solids*, Vol. 28 No. 5, pp. 916-925.
- Thai, H.-T. and Vo, T.P. (2012), "A nonlocal sinusoidal shear deformation beam theory with application to bending, buckling, and vibration of nanobeams", *International Journal of Engineering Science*, Vol. 54 No. 9, pp. 58-66.
- Wang, Q. and Liew, K.M. (2007), "Application of nonlocal continuum mechanics to static analysis of micro- and nano-structures", *Physics Letters A*, Vol. 363, pp. 236-242.
- Zhang, X.M., Chau, F.S., Quan, C., Lam, Y.L. and Liu, A.Q. (2001), "A study of the static characteristics of a torsional micromirror", *Sensors and Actuators A: Physical*, Vol. 90 Nos 1/2, pp. 73-81.

Corresponding author

Raffaele Barretta can be contacted at: rabarret@unina.it

For instructions on how to order reprints of this article, please visit our website:

www.emeraldgrouppublishing.com/licensing/reprints.htm

Or contact us for further details: permissions@emeraldinsight.com