

# A system dynamics approach to evaluating factors influencing whole life cost estimation for residential buildings in New Zealand

Herath Mudiyansele Samadhi Nayanathara Samarasekara  
*Department of Design and Creative Technologies,  
Auckland University of Technology, Auckland, New Zealand*

Purushothaman Mahesh Babu and Funmilayo Ebum Rotimi  
*School of Future Environments, Auckland University of Technology,  
Auckland, New Zealand, and*

Ali Ghaffarianhoseini  
*Department of Design and Creative Technologies,  
Auckland University of Technology, Auckland, New Zealand*

## Abstract

**Purpose** – This study aims to apply a system dynamics approach to examine and model the interrelated factors affecting whole lifecycle estimation for residential buildings within the New Zealand construction context. Accurately estimating the whole life cost (WLC) of residential buildings is critical to achieving long-term economic and environmental sustainability. However, existing WLC frameworks often overlook the dynamic interdependencies among influencing factors, particularly within New Zealand's unique construction context, characterised by seismic activity, climate variability and supply chain constraints.

**Design/methodology/approach** – This study applies a system dynamics approach to model and analyse these complex relationships, integrating insights from a systematic literature review and 22 semi-structured interviews with industry professionals. The analytic hierarchy process was used to prioritise and weight 80 identified factors based on their relative influence, with consistency of expert judgements confirmed through the consistency ratio. These normalised weights were then combined with directional relationship mapping to construct a linkage matrix that informed the development of causal loop diagrams and stock-and-flow models.

**Findings** – The research highlights key feedback loops and time delays that affect lifecycle cost elements, including construction, operation and maintenance. Findings reveal significant gaps in current international frameworks such as ICMS, particularly their inability to accommodate regional risks and behavioural influences.

**Research limitations/implications** – The study proposes a context-specific enhancement to WLC methodologies, enabling more accurate and resilient cost estimation. This tailored framework supports informed decision-making by stakeholders and advances sustainable residential construction practices in New Zealand. However, the qualitative nature of the research limits the generalisability of findings beyond New Zealand's residential construction sector.



**Originality/value** – This research presents a novel, comprehensive modelling approach that incorporates regional and behavioural factors specific to New Zealand’s residential construction sector, offering enhanced accuracy and practical value beyond existing international standards.

**Keywords** Whole life cost (WLC), System dynamics, Residential buildings, New Zealand, Construction cost estimation, Feedback loops, Sustainability, Lifecycle planning

**Paper type** Research paper

## 1. Introduction

Whole life cost (WLC) estimation plays a vital role in the planning, execution and maintenance of residential buildings, serving as a cornerstone for achieving long-term sustainability and economic viability in construction projects (Wong, 2010). Practical WLC estimation facilitates effective budget management and supports informed decision-making across a building’s lifecycle (Liu and Luo, 2023). Globally, the construction industry is under increasing pressure to provide affordable and sustainable housing solutions amid rapid urbanisation, climate change and resource scarcity. As such, lifecycle cost evaluation has become essential for project-level financial planning and supporting broader policy goals related to resilience, decarbonization and inclusive urban development.

Aligned with the United Nations Sustainable Development Goal 11 (SDG 11) – Sustainable Cities and Communities, which aims to “make cities and human settlements inclusive, safe, resilient, and sustainable,” WLC estimation contributes directly to improving housing affordability, enhancing infrastructure resilience, and promoting sustainable construction practices. Accurate and adaptive cost planning is critical in ensuring that urban development not only meets immediate needs but also remains financially and environmentally viable over the long term (UN, 2015).

Despite growing interest in lifecycle-based approaches, existing WLC frameworks such as the International Construction Measurement Standards (ICMS) are often static and insufficiently adaptable to complex, real-world conditions (Zhao *et al.*, 2019). They rarely reflect the interdependent and time-sensitive nature of decisions made throughout a building’s lifecycle. Furthermore, they assume broad applicability across geographic regions, despite varying construction contexts, risk profiles and socio-environmental constraints. These limitations are particularly evident in the New Zealand residential construction sector, where contextual challenges such as seismic activity, climate variability, supply chain volatility and evolving regulatory environments complicate traditional cost estimation practices (MacGregor *et al.*, 2018). Accurate lifecycle costing in this setting requires a context-aware, systems-based approach capable of modelling how dynamic interactions and feedback loops influence long-term cost outcomes. However, a significant research gap remains, as no prior studies have examined WLC in New Zealand through a comprehensive systems thinking lens that integrates regional risks, behavioural insights and decision interdependencies.

To address this gap, the current study applies a System Dynamics (SD) approach (Sterman, 2001) to investigate the complex interrelationships among factors influencing WLC estimation for residential buildings in New Zealand. A total of 80 influencing factors were identified through a systematic literature review (SLR) and semi-structured interviews (SSIs) with local industry professionals. Building on the foundational review by Samarasekara *et al.* (2024), the study introduces additional context-specific factors and prioritises them using the analytic hierarchy process (AHP), ensuring a structured and reproducible framework (Boussabaine and Kirkham, 2008).

In doing so, this research makes three core contributions. Firstly, it provides a structured, evidence-based model that maps the reinforcing and balancing feedback loops critical to

accurate WLC forecasting in a dynamic environment. Secondly, it advances methodological rigour by combining qualitative and quantitative techniques (SD and AHP). Thirdly, and importantly, about the journal's themes, this study situates WLC estimation within the broader discourse on urbanisation, sustainability and society, by highlighting how cost planning influences housing affordability, environmental resilience and long-term infrastructure performance. In a rapidly urbanising New Zealand, where housing delivery intersects with seismic risk and sustainability commitments, improving the accuracy and contextual relevance of WLC estimation is timely and essential.

## 2. Literature review

### 2.1 Overview of whole life cost estimation

WLC is a technique used to assess and determine all direct and indirect costs associated with the design, construction, facility management, operation, maintenance, support, replacement and disposal of a building throughout its entire service life (El-Haram, Marenjak, & Horner, 2002). WLC provides a comprehensive approach to evaluating the total cost of ownership over a building's lifecycle, considering not only the initial construction costs but also operational, maintenance and end-of-life costs (Ashworth and Perera, 2015). This method enables stakeholders to make more informed decisions that balance upfront expenditures with long-term economic sustainability, offering a broader financial perspective for better decision-making in the construction industry. WLC's significance lies in its ability to reflect the total financial commitment over a building's lifespan, helping to identify cost-saving opportunities and enhance long-term value. (Kishk *et al.*, 2003).

Despite the growing recognition of its value in promoting sustainability and cost-efficiency, accurate WLC estimation remains challenging due to the complex interdependencies among the factors that influence costs. Traditional models often overlook interactions among project decisions, stakeholder roles and other dynamic factors, leading to inaccurate predictions of the actual cost of ownership.

New Zealand further amplifies these challenges by raising sustainability expectations, increasing seismic risks, introducing volatile supply chains, and imposing stringent environmental regulations. These factors directly impact construction practices and cost structures, particularly in urban areas where population growth and housing demand pressure affordability and infrastructure resilience. As urbanisation intensifies, accurately estimating lifecycle costs becomes essential for resource optimisation and addressing broader societal outcomes, such as equitable housing access, public health, and environmental impact. WLC, therefore, serves as a critical tool for supporting sustainable urban development and informed policy-making aligned with long-term societal well-being.

### 2.2 System dynamics in construction projects

SD is an effective tool for modelling complex systems with interconnected variables, feedback loops, and time-dependent behaviours. Its use in construction projects enhances understanding of interactions between project factors, aiding decision-making (Bala *et al.*, 2017). SD provides a framework for grasping these complexities, particularly concerning whole life costing (WLC) (Azar, 2012). Research demonstrates that SD improves estimation accuracy; for example, Yi *et al.* (2023) applied SD for life cycle cost (LCC) assessments in environmental scenarios, while Liu and Luo (2023) used it for cost estimation in prefabricated construction. Lou and Guo (2020) further leveraged SD techniques to analyse cost-influencing factors in prefabricated buildings. Additionally, Dabirian *et al.* (2023) used SD to manage cash flow in construction. SD's ability to track changes and incorporate feedback mechanisms

(Li and Fan, 2022) allows for effective predictions (Zhang *et al.*, 2017). Despite its potential, the use of SD for WLC in specific contexts like New Zealand's seismic and climate challenges remains limited.

### 2.3 Feedback loops and time delays in whole life cost estimation

Feedback loops are crucial for understanding cost-related dynamics. Positive feedback (reinforcing loops) can enhance benefits, such as improved design quality and lower maintenance costs (Wynn and Maier, 2022). Negative feedback (balancing loops) regulates behaviours, exemplified by trade-offs between construction speed and quality (Wynn and Maier, 2022). Time delays complicate WLC predictions; for instance, design decisions might only affect costs years later, especially regarding energy consumption and material durability (Keoleian and Menerey, 1994). Recognising these delays is essential in New Zealand, where seismic activity influences long-term building performance.

### 2.4 Frameworks and methodologies

Current WLC frameworks categorise costs into construction, operation, maintenance and disposal, but often fail to address regional complexities (Samarasekara *et al.*, 2024). The International Construction Measurement Standards (ICMS) framework, although widely recognised, has limitations when applied to specific local contexts. Its classification into non-construction costs, LCCs, income and externalities offers a standard structure (ICMS, 2021). However, it lacks adaptability to diverse regional realities. The ICMS's treatment of LCC categories overlooks critical factors, such as seismic risks and extreme weather, which significantly impact construction costs in sensitive areas like New Zealand. Samarasekara *et al.* (2024) emphasise that these omissions restrict the framework's accuracy and utility in specific contexts. Integrating SD with ICMS may help overcome these limitations, offering a more nuanced approach to cost assessment.

### 2.5 Advancing whole life cost estimation with system dynamics

Recent literature underscores the importance of adaptive models to capture the complexity of WLC. SD is increasingly recognised for its ability to model cost interdependencies, particularly in dynamic environments. For instance, Leon *et al.* (2018) found SD effective in revealing long-term impacts of design and material choices in modular buildings. Such adaptive modelling is especially relevant in New Zealand, where construction practices must address unique geographic, climatic and regulatory conditions. Integrating SD with WLC allows for a responsive framework that reflects local risks, stakeholder input and evolving policy. This study aims to develop a New Zealand-specific WLC estimation model by synthesising existing literature and applying SD principles. The proposed framework considers local materials, energy standards and sustainability goals to improve estimation accuracy and support long-term planning.

## 3. Methodology

### 3.1 Research design

This study adopts a qualitative research design to investigate the complex and interdependent factors influencing whole life cost (WLC) estimation in the New Zealand residential construction context. A combination of SLR, SSI, the AHP and SD modelling was used to identify, prioritise and model these factors.

The methodology follows a three-stage structure:

- (1) *Factor identification*: An SLR was conducted to collect globally reported factors influencing WLC estimation. SSI supplemented this with New Zealand-based construction professionals to capture context-specific insights.
- (2) *Factor prioritisation using AHP*: The combined set of 80 factors (51 from SLR and 29 from SSI) was evaluated using the AHP. AHP was selected for its ability to handle multi-criteria decision problems, enabling structured pairwise comparison of factors to determine their relative importance. This process helped streamline the number of variables for modelling and reduced bias in selecting influential factors.
- (3) *SD modelling*: The prioritised factors were used to construct causal loop diagrams (CLDs), mapping out key feedback mechanisms and interrelationships among cost drivers. This SD approach facilitated understanding of how changes in one factor may influence others over time, especially within dynamic and uncertain project environments.

### 3.2 Data collection

**3.2.1 Systematic literature review.** The SLR was conducted to identify factors influencing WLC estimation for New Zealand residential buildings, with a focus on both primary and secondary data sources. The primary data included scholarly, peer-reviewed research such as academic books, journals and conference papers, accessed via databases like Scopus, ScienceDirect, Emerald Insight, SpringerLink and Google Scholar. Secondary data included industry reports, standards and guidelines published by organisations such as RICS, AIQS, ICMS and NZIQS, which provided insights into industry practices and benchmarks.

**Table 1** presents the search strategy, inclusion and exclusion criteria, and results from each database. This process adhered to PRISMA guidelines, ensuring a systematic and transparent approach to data collection (**Figure 1**). The insights derived from the SLR established the theoretical and practical dimensions required to inform the SD model. While the SLR generally excluded review articles to prioritise primary studies, [Samarasekara et al. \(2024\)](#), a recent and comprehensive SLR, was included as a key reference due to its thorough synthesis of factors influencing whole life cost estimation. Our study is not an extension of this work but builds upon it by integrating new empirical data collected through SSI with industry experts. These interviews elicited additional factors and enriched the understanding of contextual and practical considerations specific to New Zealand's residential construction sector. **Table 2** distinguishes between factors identified through the SLR, including those from [Samarasekara et al. \(2024\)](#), and novel factors derived from the SSI, thus providing a transparent overview of the factor origins. Furthermore, the decision to limit the literature search to studies published from 2012 onwards was informed by significant regulatory and contextual shifts in New Zealand's construction environment. Following the Canterbury earthquakes of 2010, the government introduced major reforms to the Building Code and seismic design standards through the 2012 Building Act amendments ([MBIE, 2012](#)), which reshaped building practices and lifecycle costing frameworks. Literature prior to 2012 does not adequately reflect these changes or the subsequent adoption of technologies such as BIM and prefabrication. Therefore, setting 2012 as the lower bound ensures the inclusion of research that is both methodologically current and contextually relevant to today's construction practices in New Zealand.

Once the data searching strategy was established in **Table 1**, the PRISMA process was followed; the flow diagram is shown in **Figure 1**.


**Table 1.** Search strings for database search

Database	Search Strings	Inclusions	Exclusions	Range (2012–2024)
Scopus	“Whole Life Cost” OR “WLC” AND “Construction” AND “Factors”	Subject Area— Engineering Language—English	Review articles	12
Science Direct	“Whole Life Cost” OR “WLC” AND “Construction” AND “Factors”	Subject Area— Engineering Language—English	Review articles Book review Product review	33
Emerald Insight	Abstract: “Whole life cost” OR (abstract: “we”) AND (abstract: “construction”)AND (abstract: “factors”)	Access—Only content that I have accessed Content Type—Articles	Review articles	55
Springer Link	“Construction” AND “factors” AND “Whole life cost”	Discipline Engineering Subdiscipline— Building Construction and Design	Reference work entry Reference work	184
Google Scholar	“Construction” AND “factors” AND “Whole life cost”	Only in title	Review articles	65
Other databases		Nil	All other databases are excluded due to article retrieval limitations	
Total				349

**3.2.2 Semi-structured interviews.** SSIs were conducted with a purposively selected group of 22 participants, comprising both industry professionals (including quantity surveyors, project managers, architects, engineers, facility managers and policymakers) and homeowners who had actively commissioned and managed their residential building projects. Participants were identified through professional networks, referrals from industry contacts and publicly available directories such as LinkedIn and industry association membership lists (e.g. NZIQS and NZIA). This recruitment strategy ensured access to experienced professionals with relevant expertise in residential construction and whole life cost estimation.

Once potential participants were identified, they were contacted via email or LinkedIn messaging with an invitation outlining the study’s purpose, ethical considerations, and interview process. All participants provided informed consent via a formal consent form before the interviews. Interviews were conducted via Microsoft Teams, recorded with permission and transcribed for analysis. SSI were conducted in four parts:

- (1) general experience with WLC in residential projects;
- (2) identification of key influencing factors;
- (3) exploration of interdependencies among factors; and
- (4) prioritisation of critical factors.

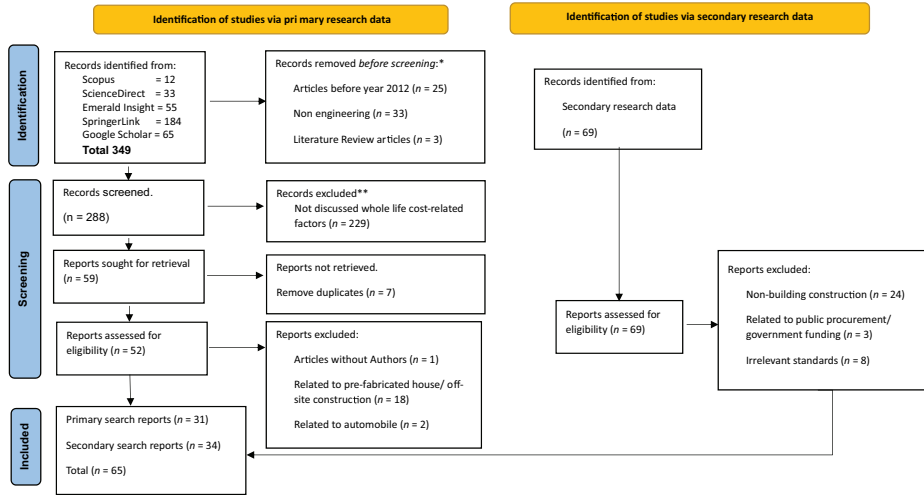

**Figure 1.** PRISMA flowchart  
**Note(s):** \*Records excluded by automation; \*\*Records excluded by human

**Table 2.** The criteria for selecting participants

Participants	Selection criteria	No. of participants
Homeowners	Clients who built residential houses and were involved in financial decision-making	2
Architects	Experts in residential design and sustainable design practices	2
Engineers (Service and Structural)	Professionals with expertise in the technical and engineering aspects of residential buildings	4
Quantity surveyors	Professionals with experience in cost estimation and WLC analysis	8
Project managers	Individuals overseeing residential projects from initiation to completion	3
Facility managers	Experts in the management and maintenance of residential buildings post-construction	2
Government authorities	Representatives from regulatory bodies with expertise in building regulations and standards	1

These interviews informed the identification of additional context-specific factors, validated factor categorisation for the AHP and clarified the nature of relationships used in SD modelling. The interview guide, designed to ensure consistency and comprehensiveness, is provided in supplemental materials (see supplemental materials: Interview Questions).

This selection process ensured a comprehensive range of perspectives on the factors influencing WLC estimation in New Zealand.

### 3.3 Data analysis

**3.3.1 Analytic hierarchy process.** The AHP is a structured technique for organising and analysing complex decisions, based on mathematics and psychology (Milkova *et al.*, 2019). In this study, AHP was applied to prioritise WLC-influencing factors identified through the SLR and SSI, establishing their relative importance for the New Zealand context (Samarasekara *et al.*, 2024). The AHP framework was structured hierarchically, with accurate WLC estimation at the top level, followed by relevant criteria and sub-criteria, and specific factors at the lowest level (de FSM Russo & Camanho, 2015). Figure 2 shows the modified levels of factors using the ICMS framework. This structure allowed for systematic pairwise comparison of factors, using a standard 1–9 scale to capture subjective judgements (Kou *et al.*, 2016).

- 1: Equal importance
- 3: Moderate importance
- 5: Strong importance
- 7: Very strong importance
- 9: Absolute importance

To justify the scores applied in the pairwise comparison matrix (supplemental materials), a frequency-based scoring method was adopted for both the SLR and the SSI.

For the SLR (51 factors from 65 sources), importance scores were derived from the frequency with which each factor appeared across the reviewed studies. The scoring thresholds and illustrative examples are summarised in Table 3.

For the SSI (29 factors from 22 participants), factor importance was based on the number of interviewees who identified or discussed each factor. The scoring rationale is summarised in Table 2.

Where a factor was identified in both SLR and SSI, the higher of the two scores was retained in the matrix to ensure that either academic consensus or practical relevance could independently validate the importance level. A pairwise comparison matrix was created to assess the relative influence of each factor. The matrix was then normalised by dividing each cell by the total of its respective column, enabling accurate computation of relative weights (Talukder *et al.*, 2017). The row averages of the normalised matrix were calculated to determine the weights for each factor (Collins *et al.*, 2023).

The normalisation process involves two key steps. First, column-wise normalisation was performed by dividing each element in column *j* by the sum of all elements in that column, transforming the matrix so that each column sums to 1:

$$a_{ij}^{\{norm\}} = \frac{a_{ij}}{\sum_{i=1}^{\{n\}} a_{ij}} \quad (1)$$

This step results in a normalised matrix in which each column sums to unity. Second, to obtain the final normalised weight vector, the average of each row was calculated across the normalised matrix:

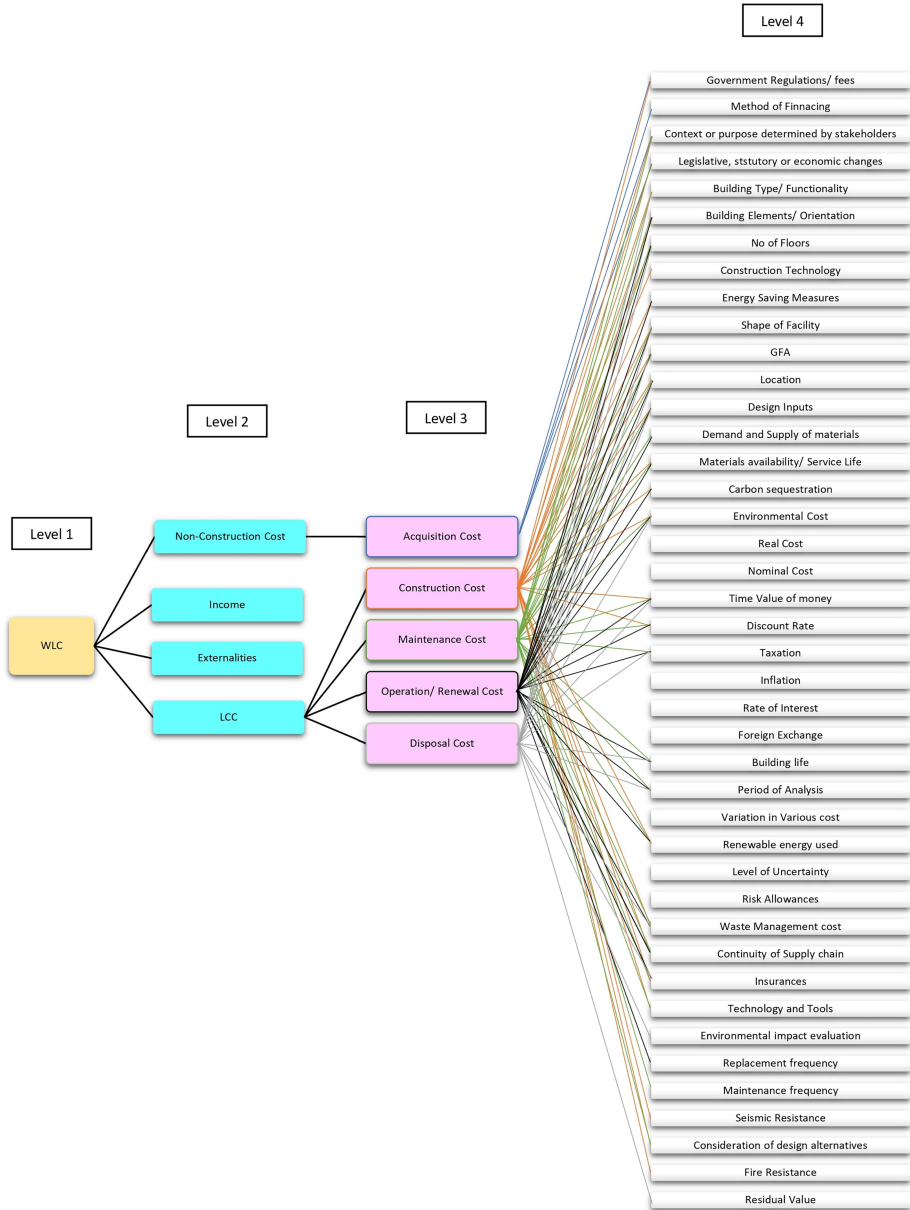


Figure 2. Modified levels of factors using the ICMS framework (Samarasekara et al., 2024)

**Table 3.** Scoring justification based on SLR frequency

SLR score	Citation frequency in SLR sources	Interpretation	Example factors
9	≥50 sources	Universally cited as critical in literature	Maintenance Cost (59), Construction Cost (55)
7	35–49 sources	Frequently cited in majority of studies	Residual Value (46), Discount Rate (32)
5	20–34 sources	Moderately cited and contextually significant	Time Value of Money (29), Taxation (17)
3	10–19 sources	Occasionally cited; moderate influence	Environmental Impact Evaluation (14), Inflation (16)
1	<10 sources	Rarely cited or marginal in academic discourse	Fire Resistance (1), Foreign Exchange (1)

$$w_i = \frac{1}{\sum_{j=1}^n a_{ij}^{(norm)}} \quad (2)$$

This gives a single scalar value per row, representing the relative priority or weight of each factor. The reason the final output is expressed as a single-column vector is because the primary goal of AHP is to rank the criteria by their relative importance. This single column is not derived from any particular column of the original matrix but rather from the row-wise averages of the column-normalised matrix, thus capturing the overall priorities effectively.

Then, a consistency ratio (CR) was computed to ensure consistency in judgment. A CR value below 0.1 was considered acceptable; otherwise, the matrix was revised to improve logical coherence (Karapetrovic and Rosenbloom, 1999).

After confirming consistency, relationships among factors were further analysed. Positive relationships were marked by proportional effects (i.e. an increase in one factor caused an increase in another), while negative relationships indicated inverse effects. In the final matrix, positive relationships were multiplied by +1, and negative relationships by -1, to reflect their directional influence on WLC estimation (Zhang et al., 2021). Due to the novelty of SD modelling within the local construction sector, polarities between factors were assumed based on logical reasoning and cross-referenced literature, as industry participants lacked familiarity with SD concepts. Finally, these weighted and directional relationships were mapped to establish an interconnected framework, revealing how individual factors influence each other within the WLC estimation system. This approach facilitated a more nuanced and dynamic understanding of factor behaviour, moving beyond static weightings to identify reinforcing and balancing effects across the system (Rush and Roy, 2023).

**3.3.2 Thematic analysis and integration with system dynamics.** The data gathered from the SSIs were analysed using thematic analysis following (Braun and Clarke, 2006). This process involved familiarising with the data, coding relevant responses based on research questions and grouping them into broader themes. These themes were then interpreted to identify the most significant factors influencing WLC estimation in New Zealand. The thematic analysis helped identify critical insights regarding the interrelationships between factors and challenges in current WLC estimation practices. Thematic analysis was

conducted using NVivo software to code, organise and analyse qualitative data from the SSIs. This allowed for systematic identification of recurring themes, relationships and contextual insights relevant to WLC estimation.

The insights from the interviews were used to enhance the understanding of the interrelationships between the identified WLC factors, which were mapped using SD modelling. This modelling approach was employed to visualise feedback loops and dependencies, which will inform the development of a more accurate, contextually relevant WLC framework for New Zealand. The model incorporated local factors, such as seismic risks and climate conditions, not captured in existing frameworks.

### 3.4 Ethical considerations

The study was conducted in accordance with the Auckland University of Technology Human Ethics Guidelines and was approved by the AUT Ethics Committee (24/206).

### 3.5 Limitations of the methodology

This study's methodology is subject to some limitations. While using a purposive sample ensures relevant expertise, the findings may not fully represent the diversity of experiences across New Zealand's residential construction sector. Furthermore, the qualitative nature of the research means that the findings may not be generalisable to other contexts. However, the in-depth insights from the interviews and the integration of the SLR provide a robust basis for refining WLC estimation frameworks specific to New Zealand.

## 4. Results and discussion

This section presents the findings from the SLR, SSI, AHP and SD modelling to address the research objectives, particularly establishing the SD of elements affecting the accuracy of WLC estimation for residential buildings in New Zealand. The results highlight key factors, their interactions, critical feedback loops and prioritised factors, culminating in practical implications for stakeholders. The discussion integrates these findings to enhance WLC estimation accuracy, accounting for New Zealand's seismic and climatic challenges.

### 4.1 Key factors influencing whole life cost

The SLR, covering 65 sources from 2012 to 2024, identified 51 factors influencing WLC, as detailed in [Samarasekara et al. \(2024\)](#). These factors span the construction, operation, maintenance and disposal phases, with emphasis on sustainability, seismic resilience, energy use and operational costs. [Table 4](#) consolidates these factors.

The SSI, involving 22 participants as detailed in [Table 5](#), identified 29 additional factors summarised in [Table 6](#). Key factors included building automation, renewable energy systems and regional variations. These factors are particularly relevant to New Zealand's unique context, where seismic risks and adverse weather conditions significantly affect the accuracy of WLC estimation. For example, participants stressed the need to use corrosion-resistant materials in coastal zones and implement seismic bracing in regions near fault lines, which aligns with the post-earthquake reforms outlined by [MBIE \(2012\)](#).

SSIs with 22 construction professionals in New Zealand revealed a range of practical, context-specific factors that influence the accuracy of whole life cost estimation in residential buildings. As detailed in [Table 2](#), these factors extend beyond those commonly discussed in the literature, highlighting unique operational and environmental conditions in the New Zealand context. Among the most frequently cited were material durability, construction quality, installation practices, technology depreciation and regional or geographical conditions. These

**Table 4.** Scoring justification based on SSI mentions

SLR score	Citation frequency in SLR sources	Interpretation	Example factors
9	≥15 participants	Strong consensus across industry professionals	Material Durability (17), Construction Quality (16)
7	10–14 participants	Frequently mentioned by a wide range of roles	Seismic Resistance (12), Building Orientation (11)
5	6–9 participants	Common but not dominant across interviews	Supply Chain Resilience (7), Smart Systems (8)
3	3–5 participants	Occasionally mentioned; some practical relevance	Green Star Rating (5), Tech Depreciation (4)
1	<3 participants	Rare or minor focus among stakeholders	Acoustic Performance (2), Foreign Exchange (1)

elements reflect professionals' experiences working across various roles and contribute to more accurate cost projections over a building's lifespan. Table 6 also identifies occupancy behaviours, Green Star ratings and building orientation as significant influences on long-term performance and operational costs. These factors are often overlooked in standard cost frameworks but were highlighted by practitioners as key drivers that shape building efficiency and user experience over time. Their inclusion underscores the importance of behavioural and environmental variables in developing reliable cost estimations.

Several interviewees also emphasised localised risk factors such as seismic resilience, insurance requirements and the influence of regional hazards on material selection and structural systems. These risks were discussed in greater detail than typically found in the literature, pointing to their relevance in initial decision-making and long-term cost planning. Furthermore, insights in Table 6 reveal that supply chain resilience, availability of skilled labour and the effectiveness of on-site communication play a crucial role in determining project outcomes and associated costs. Rather than isolated technical inputs, these are dynamic and interconnected processes that influence project efficiency, rework frequency and delivery timelines. For example, poor coordination between teams or delays due to labour shortages were cited as causes of unforeseen expenditures and budget overruns. The responses summarised in Table 6 demonstrate that WLC estimation in New Zealand's residential sector is shaped by an integrated set of behavioural, environmental, technical and managerial factors. These findings suggest that accurate WLC modelling must consider component-based costs and the broader interaction system that evolves throughout the building lifecycle.

Together, 51 SLR factors are shown in Samarasekara *et al.* (2024) and SSI findings produced a consolidated list of 80 factors, later refined through AHP and SD modelling to highlight only those with significant interdependencies.

#### 4.2 Integration of pairwise comparisons into system dynamics modelling

The relationships among the 80 identified factors were mapped using SD modelling to construct the CLD (Figure 3, supplemental materials), which revealed 11 reinforcing (R1–R11) and 12 balancing (B1–B12) feedback loops driving WLC dynamics. Key themes emerging from the updated codebook include cost factor feedback, environmental influences, geographic variations, estimation challenges, factor interactions and systemic interdependencies, as summarised in Table 7.

**Table 5.** Consolidation of SLR factors mentioned in [Samarasekara et al. \(2024\)](#)

Factors	No. of sources
Maintenance cost	59
Disposal/end-of-life cost	57
Operation cost/renewal cost	57
Construction cost	55
Residual value	46
Time value of money	38
Upfront acquisition cost	35
Discount rate	32
Period of analysis	29
Building life	27
Government regulations/ fees	20
Income generated from the asset	18
Materials availability/ service life	17
Taxation	17
Inflation	16
Building type/ functionality	15
Environmental impact evaluation	14
Building element/ orientation	13
Maintenance frequency	13
Gross floor area	12
Replacement frequency	12
Risk allowances	12
Waste management cost	11
Design inputs	10
Environmental cost	10
Location	9
Number of floors/ Height/ level above and below ground	9
Nominal cost	9
Rate of interest	9
Carbon sequestration	8
Construction technology	8
Context or purpose determined by stakeholders	8
Energy saving measures and cost	7
Real cost	7
Legislative, statutory or economic changes	6
Estimated annual occupancy hours	5
Externalities	4
Green building certification cost	4
Shape of facility	4
Technology and tools	3
Consideration of design alternatives	2
Continuity of supply chain	2
Level of uncertainty	2
Renewable resources used	2
Variations in various costs	2
Demand and supply of materials	1
Fire resistance	1
Foreign exchange	1
Insurances	1
Method of financing	1
Seismic resistance	1

**Table 6.** Additional factors influencing WLC identified in SSI

Item	Interview Ref	Profession	Building occupancy type	Building Age	Insurance and risk mitigation	Construction quality	Water management system	Factors Building automation and smart systems	Building resilience to natural hazards	Renewable energy system	Supply chain resilience and cost	Building maintenance technologies
1	GA	Government Authority										
2	A1	Architect			1							
3	A 2	Architect							1			1
4	HM1	Homeowner										
5	HM2	Homeowner										
6	EE 1	Electrical Engineer										
7	EE 2	Electrical Engineer										
8	SSM 1	Structural site manager										
9	SS 1	Site supervisor (Fit-out)										
10	FM 1	Facilities manager										
11	FM 2	Facilities manager										
12	PM 1	Project Manager			1							
13	PM 2	Project Manager										
14	PM 3	Project Manager										
15	QS 1	Quantity Surveyor	1	1	1	1		1				
16	QS 2	Quantity Surveyor										
17	QS 3	Quantity Surveyor										
18	QS 4	Quantity Surveyor	1	1	1	1	1	1	1	1	1	1
19	QS 5	Quantity Surveyor										
20	QS 6	Quantity Surveyor										
21	QS 7	Quantity Surveyor										
22	QS 8	Quantity Surveyor										
	Totals		2	2	4	2	1	2	2	1	1	2

(continued)


Table 6. Continued

Item	Interview Ref	Profession	Building orientation and solar gain	Building occupancy behaviours	Building security system	Health and well-being	Government incentives and subsidies	Technology depreciation	Type of Materials and quality	Regional and geographical conditions	Cost vs Benefits
1	GA	Government Authority									
2	A1	Architect							1		
3	A 2	Architect			1				1	1	
4	HM 1	Homeowner									
5	HM 2	Homeowner									
6	EE 1	Electrical Engineer									
7	EE 2	Electrical Engineer									
8	SSM 1	Structural site manager				1			1		
9	SS 1	Site supervisor (Fit-out)							1		1
10	FM 1	Facilities manager									
11	FM 2	Facilities manager									
12	PM 1	Project Manager									
13	PM 2	Project Manager				1				1	
14	PM 3	Project Manager									
15	QS 1	Quantity Surveyor							1	1	
16	QS 2	Quantity Surveyor									
17	QS 3	Quantity Surveyor									
18	QS 4	Quantity Surveyor	1	1	1	1	1	1	1	1	
19	QS 5	Quantity Surveyor									
20	QS 6	Quantity Surveyor									
21	QS 7	Quantity Surveyor									1
22	QS 8	Quantity Surveyor									
	Totals		1	1	2	4	1	1	6	5	2

(continued)

**Table 6.** Continued

Item	Interview Ref	Profession	Others (already included in)	Greenstar Rating	Material Durability	Installation practice	Comparability with other building systems	Factors				Effectiveness of on-site communication and coordination between teams	Availability of skilled labour
								Acoustic performance	Resistance to wear and tear	Efficiency of materials/equipment	Unforeseen circumstances		
1	GA	Government Authority											
2	A1	Architect	1										
3	A 2	Architect											
4	HM1	Homeowner		1									
5	HM2	Homeowner			1								
6	EE 1	Electrical Engineer	1										
7	EE2	Electrical Engineer	1										
8	SSM.1	Structural site manager											
9	SS 1	Site supervisor (Fit-out)				1		1				1	
10	FM 1	Facilities manager											1
11	FM 2	Facilities manager	1										
12	PM 1	Project Manager											
13	PM 2	Project Manager											
14	PM 3	Project Manager	1										1
15	QS 1	Quantity Surveyor								1			
16	QS 2	Quantity Surveyor	1										
17	QS 3	Quantity Surveyor	1	1	1								
18	QS 4	Quantity Surveyor	1										1
19	QS 5	Quantity Surveyor	1										
20	QS 6	Quantity Surveyor	1										
21	QS 7	Quantity Surveyor	1										
22	QS 8	Quantity Surveyor	1										
	<i>Totals</i>		13	2	2	1	1	1	1	1	1	2	1

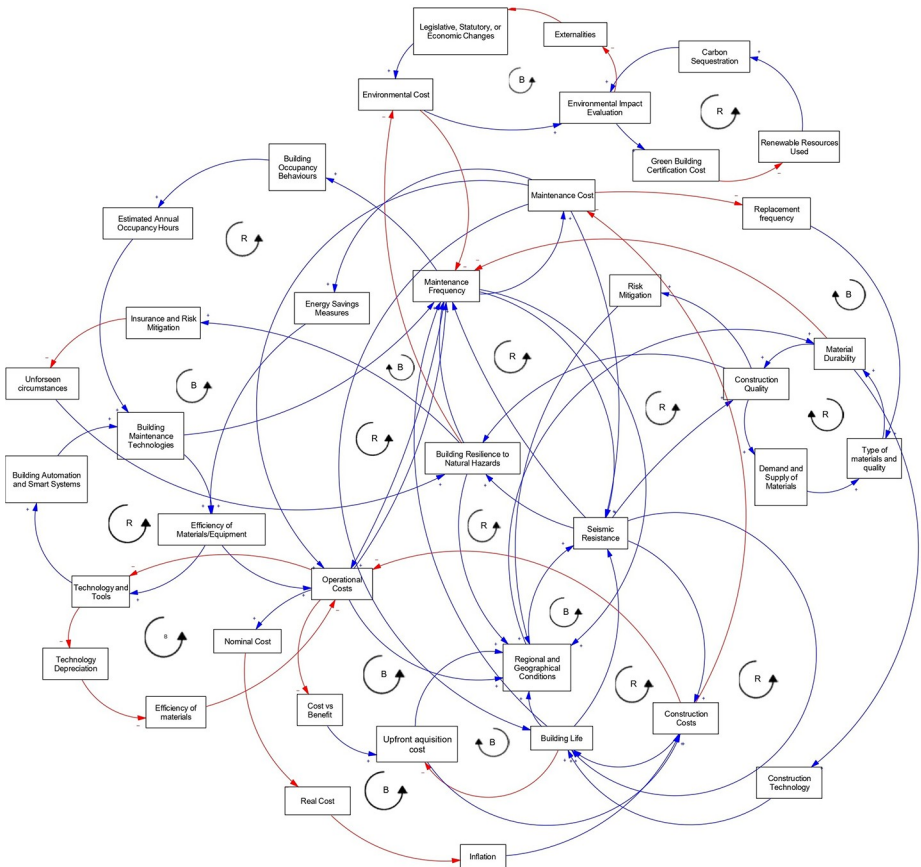

**Figure 3.** Reinforcing and balancing loops

To quantify the strength of interrelationships, AHP pairwise comparisons were conducted (supplemental materials: Pairwise Comparison Matrix). For each factor, the geometric mean of comparison values was calculated and normalised (supplemental materials: Normalised Weights), resulting in a priority vector with weights summing to one. The consistency of expert judgments was validated using the Consistency Index (CI) and CR, based on the principal eigenvalue ( $\lambda_{max}$ ) derived from the weighted sum vector. The resulting CR was effectively zero, indicating excellent consistency in the comparisons.

The directional influence of each factor was determined by integrating the normalised weights with relationship polarity identified through interview data and literature (supplemental materials: Relationship Polarity Table). Positive relationships retained their normalised weights, reflecting direct influence (e.g. increased investment in renewable energy leading to reduced operational costs). In contrast, negative relationships were adjusted to reflect inverse influence (e.g. higher upfront costs leading to long-term savings). This integration of strength and polarity was then used to construct the directional linkage matrix (supplemental materials: Linkage

**Table 7.** Summary of causal feedback loops in WLC estimation

Loop ID	Loop name	Loop variables	Type	Main driver	Main consequence
R1	Seismic investment & longevity	Regional Conditions → Seismic Resistance → Construction Costs → Building Life → Regional Conditions	Reinforcing	Regional conditions	Increased investment in durable, long-life buildings
R2	Seismic operational savings	Regional conditions → Seismic resistance → Maintenance frequency → Operational costs	Reinforcing	Seismic resistance	Lower maintenance and operating costs
R3	Energy efficiency loop	Energy measures → Equipment efficiency → Operation/renewal cost → Maintenance frequency → Maintenance cost	Reinforcing	Energy saving measures	Reduced lifecycle costs and resource use
R4	Green certification feedback	Certification cost → Renewable resources used → Carbon sequestration → Environmental evaluation	Reinforcing	Certification efforts	Increased sustainability and justification of green costs
R5	Resilience & maintenance reduction	Seismic resistance → Hazard resilience → Maintenance frequency → Maintenance cost	Reinforcing	Seismic resistance	Reduced damage and long-term maintenance costs
R6	Durable materials demand cycle	Demand & supply → Material quality → Material durability → Construction quality → Demand & supply	Reinforcing	Market demand	Higher construction quality and lifecycle performance
R7	Smart tech efficiency loop	Technology → Automation/ Smart Systems → Maintenance Tech → Equipment efficiency → Technology	Reinforcing	Technology adoption	Higher system efficiency and predictive maintenance
R8	Occupancy behaviour feedback	Occupant behaviour → Occupancy hours → Maintenance tech → Maintenance frequency → Occupant behaviour	Reinforcing	Occupant awareness	Reduced wear, costs, and more sustainable user practices
R9	Regional seismic quality loop	Region → Seismic resistance → Construction quality → Resilience → Region	Reinforcing	Regional risk profile	Safer buildings aligned with local hazard conditions
R10	Regional material durability	Region → Material durability → Construction technology → Building life → Maintenance frequency	Reinforcing	Climate/ Geographic conditions	Reduced frequency of maintenance
R11	Risk mitigation feedback	Region → Seismic resistance → Construction quality → Risk mitigation	Reinforcing	Seismic risk	Stronger construction and reduced seismic vulnerability
B1	Seismic cost-value loop	Seismic resistance → Construction cost → Maintenance cost → Building life → Seismic resistance	Balancing	Seismic design standards	Long-term savings balance high initial costs
B2	Upfront vs lifespan cost	Regional conditions → Seismic resistance → Building life → Upfront acquisition cost	Balancing	Regional risk	Justifies high acquisition cost via extended lifespan
B3	Resilience & environmental impact	Seismic resistance → Hazard resilience → Environmental impact → Renewal cycles	Balancing	Seismic resilience	Reduces lifecycle environmental impact
B4	Cost-benefit trade-off loop	Cost vs benefit → Upfront cost → Construction cost → Operational/Renewal cost → Cost vs benefit	Balancing	Cost-efficiency consideration	Aligns high upfront cost with long-term efficiency gains

(continued)

**Table 7.** Continued

Loop ID	Loop name	Loop variables	Type	Main driver	Main consequence
B5	Inflation impact loop	Inflation → Construction/ Maintenance cost → Nominal cost → Real cost → Inflation	Balancing	Inflation	Adjusts financial decisions based on real vs nominal value
B6	Environmental compliance feedback	Legislative/Economic changes → Environmental cost → Evaluation → Externalities → Policy changes	Balancing	Regulatory environment	Adapts policies to manage unintended environmental impacts
B7	Durability investment loop	Material durability → Maintenance cost → Replacement frequency → Material quality → Material durability	Balancing	Material quality	Encourages durable material use for lifecycle cost stability
B8	Insurance & resilience loop	Hazard resilience → Insurance/ Risk mitigation → Unforeseen events → Hazard resilience	Balancing	Natural hazard exposure	Improves risk planning through resilient design
B9	Tech depreciation cycle	Technology → Depreciation → Efficiency → Operational/ Renewal cost → Technology	Balancing	Tech lifecycle	Maintains performance through reinvestment
B10	Occupancy-cost adjustment	Occupancy type → Occupant behaviour → Maintenance cost → Operational cost → Occupancy type	Balancing	Occupant behaviour	Aligns occupancy patterns with cost- efficient usage
B11	Resilience-cost feedback	Hazard resilience → Insurance/ Risk → Construction cost → Hazard resilience	Balancing	Risk management	Reinforces resilient design by reducing financial exposure
B12	Eco-Cost reduction loop	Environmental cost → Greenstar rating → Renewable use → Carbon sequestration → Environmental cost	Balancing	Green certification systems	Drives down environmental costs through sustainable choices

Weight Matrix), enabling the causal structure to reflect real-world feedback behaviour within WLC estimation accurately.

The CLD's reinforcing loops, such as the link between regional seismic risks, investment in seismic design and increased building life (R1), and energy-saving measures reducing long-term costs (R3), highlight how certain factors amplify WLC dynamics. Conversely, balancing loops such as trade-offs between construction quality, cost, and long-term maintenance stabilise the system and reveal key cost tensions (e.g. B1, Cost Factor Feedback). These interdependencies reflect New Zealand's seismic and climatic challenges (MBIE, 2012) and emphasise the need for adaptive, long-term planning.

By combining structured weighting, directional mapping and qualitative insights, this approach offers a context-sensitive alternative to static cost frameworks. It supports the development of a responsive WLC estimation model tailored to the complexity and uncertainty of residential construction in New Zealand.

Recognising the reinforcing and balancing loops identified in the CLD (Figure 3) makes it essential to capture the ripple effects of decisions across a building's lifecycle. For example, the reinforcing loop between innovation and cost efficiency can encourage further technology adoption, strengthening supply chain resilience. As shown in the CLD (supplemental materials) and summarised in Table 7, mapping these relationships supports a strategic, systems-based approach to sustainable construction.

#### 4.3 Identification and impact of factors within system feedback loops

From the 80 factors identified through a comprehensive SLR and stakeholder interviews, the final selection of 37 factors was made based on their involvement in the dynamic causal feedback loops modelled using SD. This refinement process ensures that only factors that substantially influence WLC estimation in New Zealand's residential construction context are included.

The initial evaluation involved a detailed pairwise scoring and comparison of all 80 factors (see supplemental materials: The Pairwise Score Table), followed by normalisation of the scores to determine relative importance (see supplemental materials: The Normalisation Table). Subsequently, pairwise relationships among factors were analysed to understand their interactions (supplemental materials: The Pairwise Relationships). This process identified factors that actively reinforce and balance the system's feedback loops. The CLD (supplemental materials: The CLD) visualises these interactions, showing how 37 factors consistently interact within the system to drive lifecycle cost behaviour. These factors include critical elements such as seismic resistance, material durability, construction quality, energy efficiency and occupant behaviour, which emerged repeatedly from stakeholder interviews and literature.

Table 8 presents these 37 impactful factors, selected for their embeddedness within the system's behaviour rather than their isolated effects. Their influence spans multiple lifecycle stages, including design, construction, operation, maintenance and disposal. It captures key New Zealand-specific drivers, including seismic risk, local climate conditions, technology adoption and construction practices. Supplemental materials: The Linkage Table details the further refinement and linkage of these factors, mapping the systemic pathways through which these variables affect WLC. This approach ensures the model's clarity and practical relevance, avoiding unnecessary complexity while maintaining a robust representation of real-world cost dynamics.

By grounding the WLC estimation model in these 37 interconnected, context-specific factors, the research bridges theoretical cost frameworks with practical construction realities in New Zealand. This selection supports improved accuracy, stakeholder engagement and policy direction to enhance lifecycle cost predictability and performance in residential buildings.

#### 4.4 Practical implications for policymakers and stakeholders

The findings of this study have important implications for policymakers and stakeholders. Developing localised WLC frameworks that incorporate seismic and weather-specific considerations is essential for policymakers. Offering subsidies or tax benefits for projects that integrate energy-efficient and sustainable systems could incentivise the broader adoption of these practices. Additionally, promoting training initiatives to enhance stakeholder knowledge of WLC principles would support the implementation of more robust frameworks.

For stakeholders, fostering early-stage collaboration among architects, engineers and clients can help align expectations and optimise designs, improving cost efficiency. Integrating renewable energy systems and innovative technologies is also crucial for reducing operational costs. Prioritising investments in seismic-resistant designs can mitigate lifecycle repair costs, ensuring long-term value and safety.

Adopting improved WLC frameworks at an industry-wide level could lead to enhanced sustainability practices, better resource allocation and more resilient building systems tailored to New Zealand's unique challenges. By addressing the interplay of factors identified in this study, stakeholders can make more informed decisions, ultimately contributing to the economic and environmental sustainability of residential construction projects.

**Table 8.** Summary of the factors interacting in feedback loops

Factor	Description
Regional and geographical conditions	Dictate construction requirements based on local challenges, such as salinity, cold weather and seismic zones, affecting materials, design and costs. These factors influence maintenance, efficiency and resilience, making them critical for WLC analysis
Seismic resistance	Ensures structural integrity in earthquake areas, lowering repair costs and safeguarding occupant safety. While raising upfront costs, it boosts asset longevity and cuts lifecycle costs
Construction costs	Immediate impact on project feasibility and long-term operational costs. Accurate estimation and resource allocation optimise lifecycle costs, underscoring the importance of efficient financial planning
Building life cycle	Defines the timeframe during which a structure's functionality is active. Longer life cycles reduce replacements and waste while lowering operational costs, supporting sustainability and cost-effectiveness
Maintenance frequency	Influences operational budgets and financial sustainability. Durable materials and advanced maintenance technologies minimise intervention needs, aligning with cost-efficiency goals
Operational costs	Encompass energy consumption, repairs and upkeep. Efficient systems and durable materials reduce expenses, ensuring predictable costs over the building's lifespan
Energy savings	Investments in energy-efficient systems yield significant cost savings and align with sustainability goals, increasing market value and reducing environmental impact
Material and equipment efficiency	High-performance materials and energy-efficient equipment reduce wear and tear and utility bills, extending asset lifespan and reducing maintenance needs
Green building certification costs	Upfront compliance investments improve property value, attract eco-conscious tenants and reduce long-term operational costs through sustainable practices
Renewable resources	Incorporation of solar energy, sustainably sourced timber, etc., reduces dependency on finite resources, lowers operational costs and aligns with environmental goals
Carbon sequestration	Materials that absorb carbon dioxide reduce a building's environmental impact, align with sustainability strategies and improve environmental impact evaluations
Environmental impact evaluations	Guide better material selection and design decisions, ensuring regulatory compliance, reducing financial penalties and influencing WLC
Building resilience to natural hazards	Investments in resilient materials and designs mitigate repair costs and operational disruptions, improving lifecycle performance and occupant safety
Construction quality	Ensures durability, reducing defects and long-term costs while enhancing lifecycle efficiency and project success
Demand and supply of materials	Stable supply chains prevent delays and cost overruns, enabling efficient budget and timeline management
Material durability	Durable materials withstand environmental stress, reducing maintenance and replacement costs and improving resource utilisation
Building automation and smart systems	Optimise energy use, reduce errors and predict maintenance needs, leading to cost savings and enhanced operational performance

*(continued)*

**Table 8.** Continued

Factor	Description
Building maintenance technologies	Predictive systems reduce maintenance frequency and costs by preventing large-scale repairs, enhancing asset performance
Building occupancy behaviours	Responsible usage patterns reduce strain on systems, extending equipment lifespan and minimising costs, significantly impacting WLC
Estimated annual occupancy hours	Optimised usage reduces energy consumption and wear, enhancing cost efficiency over the building's lifecycle
Technology and tools	Improve construction precision and efficiency, reducing waste and improving resource management to lower WLC
Technology depreciation	Managing depreciation ensures operational efficiency and minimises costs as older systems become less effective
Insurance and risk mitigation strategies	Reduce financial exposure to unforeseen events to enhance financial stability and lifecycle performance
Environmental cost	The financial impact of ecological damage drives sustainable practices, reducing long-term expenses and the environmental footprint
Maintenance cost	Durable materials and advanced practices lower costs, making maintenance management vital for WLC
Type of materials and quality	High-quality materials reduce lifecycle costs by minimising repairs and replacements, which are crucial for WLC planning
Construction technology	Improves efficiency, reduces waste and aligns with sustainability goals, optimising WLC outcomes
Upfront acquisition costs	While raising initial expenses, quality investments ensure long-term savings, justifying their inclusion in WLC strategies
Risk mitigation	Prevents costly disruptions and ensures lifecycle efficiency through proactive planning
Cost vs benefit analyses	Guides decisions by weighing upfront investments against long-term savings and performance improvements, ensuring financial prudence
Inflation	Impacts material and labour costs, requiring accurate projections to ensure sustainable budgeting
Nominal costs	Focus on immediate feasibility, but balance it with long-term performance for optimal outcomes
Real costs	Adjusted for inflation, they provide a realistic view of financial impacts over time, supporting sustainable planning
Legislative, statutory or economic changes	Shape cost structures and compliance. Staying ahead of changes ensures alignment with regulations and goals
Externalities	Pollution and resource depletion influence sustainability strategies, aligning projects with ecological and social objectives
Replacement frequency	Durable designs minimise replacement needs, reducing lifecycle costs and enhancing sustainability
Unforeseen circumstances	Proactive risk management minimises the financial impact of unexpected events, ensuring lifecycle stability

## 5. Conclusion

This study employed a SD approach to investigate the complex and interconnected factors that influence the accuracy of WLC estimation for residential buildings in New Zealand. By integrating findings from a SLR, SSIs with industry professionals and a structured factor prioritisation process, the research identified 80 factors that affect cost estimation across the building lifecycle. From this comprehensive list, 37 factors were ultimately identified as the

most impactful, as shown in [Table 8](#). These factors were selected based on their relevance to recurring themes raised by practitioners, their strong presence in practical construction settings and their active roles in influencing other elements within the system. The selection focused on those factors that influenced lifecycle decisions and outcomes, particularly where interrelationships and feedback loops were evident. This refinement process ensured that the final SD model focused on factors with meaningful influence, avoiding dilution of insights from less consequential variables.

The study revealed that conventional WLC frameworks often fail to capture the dynamic, context-specific conditions of residential construction in New Zealand. They do not adequately reflect local risks such as seismic activity, coastal exposure, regional material availability and changing regulatory environments. This study demonstrated how key factors interact over time through CLDs, reinforcing or balancing cost impacts throughout a building's lifecycle. For example, investment in resilient design can reduce maintenance frequency and operational disruptions, while behavioural choices and technology use can significantly influence long-term cost trajectories.

To enhance the model's analytical depth, AHP pairwise comparisons were used to derive a structured weighting for all 80 factors. Geometric means were calculated and normalised to produce a priority vector, and the CR was assessed to ensure the reliability of expert judgments. The resulting CR value, which was effectively zero, confirmed the internal consistency of the pairwise matrix. These weights were then integrated with directional polarity information derived from interview themes and the literature to construct a quantitatively robust linkage matrix that directly informed the CLD.

The findings have significant implications for both policymakers and stakeholders in the construction industry. For policymakers, there is a need to support the development of locally adapted Whole Life Cost frameworks that reflect New Zealand's unique environmental and regulatory context. Incentives, such as subsidies or tax benefits, for sustainable and resilient design choices can improve lifecycle performance. Education and training initiatives could also help increase industry-wide awareness and capability in lifecycle planning and cost estimation. For industry professionals, the study highlights the value of early collaboration across disciplines, integrating cost, design and performance considerations from the outset. Innovative systems, durable materials and efficient maintenance technologies were among the most frequently cited strategies for improving lifecycle outcomes. Additionally, addressing regional risks and user behaviours from the early design stage emerged as a critical consideration for achieving more accurate and resilient cost planning.

Although this study did not propose a ready-to-use WLC framework, it identified the essential factors and relationships such a framework must incorporate. The absence of a region-specific model and practitioners' limited familiarity with WLC practices highlight opportunities for further research and development in this area.

In conclusion, this study makes a significant contribution to the practice of Whole Life Cost estimation by uncovering the system-level dynamics that shape cost outcomes over time. By combining qualitative insights with structured expert weighting and validated modelling, the approach presented here provides a replicable pathway for developing more robust, adaptive and evidence-based WLC estimation tools. The findings provide a strong foundation for developing more robust, adaptive and sustainable lifecycle costing approaches in the New Zealand residential construction sector.

### **Acknowledgements**

The authors acknowledge the financial support provided by Auckland University of Technology (AUT), New Zealand.

---

**References**

- Ashworth, A. and Perera, S. (2015), "Cost studies of buildings", CRC Press LLC, available at: <http://ebookcentral.proquest.com/lib/aut/detail.action?docID=3569929>
- Azar, A.T. (2012), "System dynamics as a useful technique for complex systems", *International Journal of Industrial and Systems Engineering*, Vol. 10 No. 4, pp. 377-410.
- Bala, B.K., Arshad, F.M. and Noh, K.M. (2017), *System Dynamics. Modelling and Simulation*, Springer, p. 274.
- Boussabaine, A. and Kirkham, R. (2008), *Whole Life-Cycle Costing: risk and Risk Responses*, John Wiley and Sons.
- Braun, V. and Clarke, V. (2006), "Using thematic analysis in psychology", *Qualitative Research in Psychology*, Vol. 3 No. 2, pp. 77-101, available at: [www.tandfonline.com/doi/abs/10.1191/1478088706qp0630a](http://www.tandfonline.com/doi/abs/10.1191/1478088706qp0630a)
- Collins, R.N., Mandel, D.R. and Budescu, D.V. (2023), "Performance-weighted aggregation: Ferreting out wisdom within the crowd", In *Judgment in Predictive Analytics*, Springer, pp. 185-214.
- Dabirian, S., Ahmadi, M. and Abbaspour, S. (2023), "Analyzing the impact of financial policies on construction projects performance using system dynamics", *Engineering, Construction and Architectural Management*, Vol. 30 No. 3, pp. 1201-1221.
- de Fsm Russo, R. and Camanho, R. (2015), "Criteria in AHP: a systematic review of literature", *Procedia Computer Science*, Vol. 55, pp. 1123-1132.
- El-Haram, M.A., Marenjak, S. and Horner, M.W. (2002), "Development of a generic framework for collecting whole life cost data for the building industry", *Journal of Quality in Maintenance Engineering*, Vol. 8 No. 2, pp. 144-151, doi: <https://doi.org/10.1108/13552510210430017>.
- ICMS (2021), "ICMS: Global consistency in presenting construction life cycle costs and carbon emissions", ICMS Coalition, available at: <https://icms-coalition.org/>
- Karapetrovic, S. and Rosenbloom, E. (1999), "A quality control approach to consistency paradoxes in AHP", *European Journal of Operational Research*, Vol. 119 No. 3, pp. 704-718.
- Keoleian, G.A. and Menerey, D. (1994), "Sustainable development by design: review of life cycle design and related approaches", *Air and Waste*, Vol. 44 No. 5, pp. 645-668.
- Kishk, M., Al-Hajj, A., Pollock, R., Aouad, G., Bakis, N. and Sun, M. (2003), "Whole life costing in construction: a state of the art review", available at: <https://rgu-repository.worktribe.com/output/248559>
- Kou, G., Ergu, D., Lin, C. and Chen, Y. (2016), "Pairwise comparison matrix in multiple criteria decision making", *Technological and Economic Development of Economy*, Vol. 22 No. 5, pp. 738-765.
- Leon, H., Osman, H., Georgy, M. and Elsaid, M. (2018), "System dynamics approach for forecasting performance of construction projects", *Journal of Management in Engineering*, Vol. 34 No. 1, p. 4017049
- Li, N. and Fan, Z. (2022), "Impact evaluation of prefabricated buildings cost on game theory-cloud model", *Journal of Mathematics*, Vol. 2022 No. 1, p. 3635009
- Liu, M. and Luo, M. (2023), "Cost estimation model of prefabricated construction for general contractors based on system dynamics", *Engineering, Construction and Architectural Management*.
- Lou, N. and Guo, J. (2020), "Study on key cost drivers of prefabricated buildings based on system dynamics", *Advances in Civil Engineering*, Vol. 2020 No. 1, p. 8896435
- MacGregor, C., Dowdell, D.C., Jaques, R.A., Bint, L. and Berg, B.L. (2018), "The built environment and climate change: a review of research, challenges and the future", *BRANZ Jugendford*, New Zealand.

- MBIE (2012), "Building act 2004: Amendments and guidance updates following the Canterbury earthquakes", *Ministry of Business, Innovation and Employment*, (MBIE), Wellington, New Zealand, available at: [www.legislation.govt.nz/regulation/public/2010/0466/latest/whole.html](http://www.legislation.govt.nz/regulation/public/2010/0466/latest/whole.html)
- Milkova, M., Andreichikova, O. and Andreichikov, A. (2019), "At the junction of mathematics and psychology: Cognitive orientation of the AHP/ANP and new perspectives of structuring complexity", *International Journal of the Analytic Hierarchy Process*, Vol. 11 No. 1, pp. 110-126.
- Rush, C. and Roy, R. (2023), "Analysis of cost estimating processes used within a concurrent engineering environment throughout a product life cycle", *Advances in Concurrent Engineering*.
- Samarasekara, H.M.S.N., Purushothaman, M.B. and Rotimi, F.E. (2024), "Interrelations of the factors influencing the whole-life cost estimation of buildings: a systematic literature review", *Buildings*, Vol. 14 No. 3, p. 740, doi: <https://doi.org/10.3390/buildings14030740>.
- Sterman, J. (2001), *Systems Thinking and Modeling for a Complex World*, McGraw-Hill, Boston.
- Talukder, B., Hipel, K.W. and vanLoon, G.W. (2017), "Developing composite indicators for agricultural sustainability assessment: Effect of normalization and aggregation techniques", *Resources*, Vol. 6 No. 4, p. 66.
- UN (2015), *Transforming Our World: The 2030 Agenda for Sustainable Development*, Sustainable Development, available at: <https://sdgs.un.org/2030agenda>
- Wong, L. (2010), "Whole life costing: towards a sustainable built environment"
- Wynn, D.C. and Maier, A.M. (2022), "Feedback systems in the design and development process", *Research in Engineering Design*, Vol. 33 No. 3, pp. 273-306, doi: <https://doi.org/10.1007/s00163-022-00386-z>.
- Yi, Y., Wu, J., Zuliani, F., Lavagnolo, M.C. and Manzardo, A. (2023), "Integration of life cycle assessment and system dynamics modeling for environmental scenario analysis: a systematic review", *Science of The Total Environment*, Vol. 903.
- Zhang, C., Lee, G., D'Haro, L.F. and Li, H. (2021), "D-score: Holistic dialogue evaluation without reference", *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, Vol. 29, pp. 2502-2516.
- Zhang, S., Pan, F., Wang, C., Sun, Y. and Wang, H. (2017), "BIM-based collaboration platform for the management of EPC projects in hydropower engineering", *Journal of Construction Engineering and Management*, Vol. 143 No. 12, p. 4017087.
- Zhao, L., Wang, B., Mbachu, J. and Liu, Z. (2019), "New Zealand building project cost and its influential factors: a structural equation modelling approach", *Advances in Civil Engineering*, No. 1, p. 1362730.

### Supplementary material

The supplementary material for this article can be found online.

### Corresponding author

Herath Mudiyansele Samadhi Nayanathara Samarasekara can be contacted at: [herath.samarasekara@autuni.ac.nz](mailto:herath.samarasekara@autuni.ac.nz)